

2008

AIR QUALITY SUMMARY
STATE OF RHODE ISLAND



Department of Environmental Management
Office of Air Resources

Rhode Island Department of Health
Air Pollution Laboratory



INTRODUCTION

Ambient air quality has been monitored at a network of stations in the State of Rhode Island since 1968. The monitoring network is operated and maintained by the Rhode Island Department of Environmental Management (RI DEM) Office of Air Resources (OAR) and by the Rhode Island Department of Health (RI HEALTH) Air Pollution Laboratory via an interagency contract agreement. The ambient air quality data collected are entered quarterly in the U.S. Environmental Protection Agency's (US EPA's) Air Quality System (AQS).

PURPOSE

Monitoring data collected are used for the following purposes:

1. Determining whether the State is in attainment of national and State ambient air quality standards;
2. Tracking progress toward meeting national and State ambient air quality standards for which the State is in nonattainment;
3. Documenting maintenance of air quality standards for which the State is in attainment;
4. Providing a daily report of air quality and a forecast of the next day's air quality with appropriate health warnings, when required;
5. Providing real-time data for regional air quality maps;
6. Identifying pollution patterns and trends;
7. Assessing health and welfare effects and land use and transportation plans and evaluating the effectiveness of abatement strategies and enforcement of control regulations; and,
8. Activating emergency control procedures intended to prevent air pollution episodes.

This summary of 2008 ambient air quality data is intended to provide general information about air quality in Rhode Island and to be used as a source of statistics to support modeling studies and other air quality analyses.

AMBIENT AIR QUALITY STANDARDS AND ATTAINMENT

The US EPA has set National Ambient Air Quality Standards (NAAQS) for six air pollutants: lead (Pb), nitrogen dioxide (NO₂), sulfur dioxide (SO₂), carbon monoxide (CO), ozone (O₃) and particulate matter (PM). Two size classes of PM are regulated: particulate matter with diameters less than or equal to 10 micrometers (PM-10) and particulate matter with diameters less than or equal to 2.5 micrometers (PM-2.5). Pollutants with adopted NAAQS are referred to as “criteria pollutants.”

There are two types of NAAQS; primary NAAQS are designed to protect human health and secondary NAAQS are designed to protect the environment, property and aesthetics. The derivations of the NAAQS, as well as background information about the sources, chemistry and deleterious effects of the criteria pollutants, are documented in the US EPA’s air quality criteria documents. The NAAQS that are currently in effect are listed in Table 1.

Areas that do not meet air quality standards are called nonattainment areas. The Federal Clean Air Act requires each state with a nonattainment area to submit and implement a State Implementation Plan (SIP) which documents the measures that the State plans to take to come into attainment with the standard. The entire State of Rhode Island is a nonattainment area for ozone. Attainment status for the new lead NAAQS, which was promulgated in October 2008, has not yet been established. The State is in attainment of the NAAQS for the other criteria pollutants.

The Clean Air Act Amendments of 1990 required ozone nonattainment areas, like Rhode Island, to implement a variety of measures to limit emissions of two classes of ozone precursors, volatile organic compounds (VOC) and oxides of nitrogen (NO_x), from mobile sources (motor vehicles) and from industrial and commercial sources such as surface coating facilities, power plants and gasoline stations. Although implementation of these measures has reduced ozone levels in the State, levels continue to exceed the NAAQS during the summer months. Since Rhode Island’s air quality is substantially affected by transport of pollutants into the State, further reductions in emissions in upwind states will be necessary for Rhode Island to attain and maintain compliance with the ozone standard.

TABLE 1: NATIONAL AMBIENT AIR QUALITY STANDARDS in 2008

POLLUTANT	AVERAGING TIME	PRIMARY STANDARD	SECONDARY STANDARD
Sulfur Dioxide (SO ₂)	Annual Arithmetic Mean	0.03 ppm (80 µg/m ³)	None
	24-Hour ^A	0.14 ppm (365 µg/m ³)	None
	3-Hour ^A	None	0.5 ppm (1300 µg/m ³)
Carbon Monoxide (CO)	8-Hour ^A	9 ppm (10 mg/m ³)	None
	1-Hour ^A	35 ppm (40 mg/m ³)	None
Ozone (O ₃)	8-Hour ^B	0.075 ppm ^B (157 µg/m ³)	Same as Primary Standard
Nitrogen Dioxide (NO ₂)	Annual Arithmetic Mean	0.053 ppm (100 µg/m ³)	Same as Primary Standard
Particulate Matter ≤ 10 micrometers (PM-10)	24-Hour ^C	150 µg/m ³	Same as Primary Standard
Particulate Matter ≤ 2.5 micrometers (PM-2.5)	Annual Arithmetic Mean ^D	15.0 µg/m ³	Same as Primary Standard
	24-Hour ^E	35 µg/m ³	Same as Primary Standard
Lead (Pb)	Rolling 3-Month Average ^F	0.15 µg/m ^{3F}	Same as Primary Standard

Primary standards protect against adverse health effects. **Secondary standards** protect against welfare effects such as damage to crops, vegetation, and buildings.

^ANot be exceeded more than once a year.

^B The ozone NAAQS is violated when the average of the 4th highest daily eight-hour concentration measured in 3 consecutive years exceeds 0.075 ppm (the 0.075 ppm NAAQS became effective in May 2008)

^C To attain the PM-10 standard, 24-hour concentration at a site must not exceed 150 µg/m³ more than once per year, averaged over 3 years.

^D To attain the PM-2.5 annual standard, the annual arithmetic means of the 24-hour concentrations, averaged over 3 consecutive years, must not exceed 15 µg/m³.

^E To attain the PM-2.5 24-hour standard, the 3-year average of the 98th percentile of 24-hour concentrations at a site must not exceed 35 µg/m³.

^FOn October 15, 2008, the Pb NAAQS was changed to 0.15 µg/m³ as a rolling 3-month average, not to be exceeded in a 3-year period.

µg/m³ = micrograms per cubic meter; ppm = parts per million; mg/m³ = milligrams per cubic meter

RHODE ISLAND AMBIENT AIR QUALITY MONITORING NETWORK

During 2008, Rhode Island monitored the ambient air levels of all of the criteria pollutants except for lead to determine compliance with the NAAQS. The State discontinued NAAQS lead monitoring in 1992 because airborne lead concentrations in the State had been substantially lower than the NAAQS for that pollutant since 1986, when lead was removed from gasoline.

Monitoring was also conducted for oxides of nitrogen (NO_x), volatile organic compounds (VOCs) and carbonyls in 2008. Those pollutants are ozone precursors, pollutants which react in the atmosphere to form ground-level ozone, a criteria pollutant. In addition, many of the VOCs and carbonyls monitored are air toxics; exposure to those substances is associated with cancer and other serious health effects. Monitoring was also conducted for toxic metals, for black carbon, an indicator of diesel exhaust, and, beginning in July 2008, for semi-volatile organic compounds (SVOCs).

The locations of the criteria pollutant and air toxics monitoring sites are shown in Figures I - IV. Table 2 lists the parameters measured and the sampling methods employed at each of those sites.

TABLE 2: MONITORING SITES

Site Location	AQS Code	Latitude Longitude	Parameter Measured	Method Of Sampling	EPA Method Designation
Vernon Trailer Vernon Street Pawtucket	440070026	41.874655 -71.411667	PM-2.5	Lo Vol	Reference
			PM-10	Hi Vol	Reference
			VOCs	Canisters, GC/FID/MS	Reference
Johnson & Wales 111 Dorrance Street Providence	440070027	41.822686 -71.411089	PM-10	Hi Vol	Reference
Hallmark Building 695 Eddy Street Providence	440070028	41.80933 -71.40743	PM-2.5	Lo Vol	Reference
Brown University 10 Prospect Street Providence	440070012	41.825556 -71.405278	Oxides of Nitrogen	Chemiluminescence	Reference
			Nitrogen Dioxide	Chemiluminescence	Reference
			Sulfur Dioxide	Simulated Fluorescence	Equivalent
US EPA Laboratory 27 Tarzwell Drive Narragansett	440090007	41.491667 -71.427778	Ozone	U.V. Photometric	Reference
			PM-2.5	Beta Attenuation/Cont	N/A
			Wind Speed	Anemometer	N/A
			Wind Direction	Wind Vane	N/A
			Temperature	Spot Reading	N/A
Francis School 64 Bourne Avenue E. Providence	440071010	41.840920 -71.360949	Oxides of Nitrogen	Chemiluminescence	Reference
			Nitrogen Dioxide	Chemiluminescence	Reference
			VOCs	Canisters, GC/MS	Reference
			Carbon Monoxide	Gas Filter Correlation	Equivalent
			Ozone	U.V. Photometric	Reference

Site Location	AQS Code	Latitude Longitude	Parameter Measured	Method Of Sampling	EPA Method Designation
			PM-2.5	Lo Vol	Reference
			Carbonyls	HPLC Cartridges	N/A
			Black Carbon	Aethalometer	N/A
			Wind Speed	Anemometer	N/A
			Wind Direction	Wind Vane	N/A
			Barometric Pressure	Barometer	N/A
			Temperature	Spot Reading	N/A
			Relative Humidity	Plastic Film	N/A
			Solar Radiation	Pyranometric	N/A
			UV Radiation	UV Photometric	N/A
			Precipitation	Bucket/Continuous	N/A
Urban League 212 Prairie Avenue Providence	440070022	41.807949 -71.4151034	PM-2.5	Lo Vol	Reference
			PM-2.5	Beta Attenuation/Cont	N/A
			Speciated PM-2.5	Speciation Monitor	N/A
			PM-10	Lo Vol	N/A
			PM-10/Metals	Hi Vol	Reference
			Black Carbon	Aethalometer	N/A
			VOCs	Canisters, GC/FID/MS	Reference
			Semi-volatiles	PUF/XAD, GC/MS	Reference
			Carbonyls	HPLC Cartridges	N/A
			Wind Speed	Anemometer	N/A
			Wind Direction	Wind Vane	N/A
			Temperature	Spot Reading	N/A
			Relative Humidity	Plastic Film	N/A
Alton Jones Campus Victory Highway West Greenwich	440030002	41.615600 -71.719900	Ozone	U.V. Photometric	Reference
			Nitrogen Dioxide	Chemiluminescence	Reference
			Oxides Of Nitrogen	Chemiluminescence	Reference
			VOCs	Canisters, GC/MS	Reference
			PM-10	Hi Vol	Reference
			PM-2.5	Lo Vol	Reference
			PM-2.5	Beta Attenuation/Cont	N/A
			Wind Speed	Anemometer	N/A
			Wind Direction	Wind Vane	N/A
			Barometric Pressure	Barometer	N/A
			Temperature	Spot Reading	N/A
			Relative Humidity	Plastic Film	N/A
			Solar Radiation	Pyranometric	N/A

Figure 1
Air Quality Monitoring Network (2008)
Continuous Monitors
Site Locations



Figure 2
PM-10 Air Pollution Monitoring Network
(2008)
Site Locations



Figure 3
PM-2.5 Air Pollution Monitoring Network
(2008)
Site Locations



Figure 4
Air Toxics Monitoring Network (2008)
Site Locations



AIR QUALITY INDEX

In 1976, the US EPA developed the Pollutant Standards Index (PSI), a readily understandable way of communicating monitored air pollutant concentrations and associated health implications to the public. In June 2000, the US EPA updated the index and renamed it the Air Quality Index (AQI). The AQI converts monitored ambient concentrations of criteria pollutants to a scale of 0 to 500. An AQI level of 100 means that the monitored concentration is at the level of the short-term standard for the pollutant. The US EPA characterizes levels just above the standard (AQI of 101 –150) as “unhealthy for sensitive groups” and higher levels (AQI of 151-200) as “unhealthy.” To avoid misinterpretation of the term “sensitive groups,” Rhode Island describes all AQI levels between 100 and 200 as “unhealthy” in its health advisories.

AQI subindices are calculated every day for the highest 8-hour average concentrations of ozone (O₃) and carbon monoxide (CO) and for the 24-hour average concentration of sulfur dioxide (SO₂) and PM-2.5 recorded on the previous day. The highest of the subindices is then reported as the AQI. During the summer, the AQI is driven by the ozone and PM-2.5 subindices, while during the cooler months the AQI is based on CO, SO₂ and PM-2.5.

Rhode Island DEM reports the AQI to the local news media, accompanied by an easily understood descriptor word. A forecast for the next day’s pollutant levels, consisting only of a descriptor word, is also reported.

The Rhode Island AQI descriptors are as follows:

AQI	Descriptor
0 to 50	Good
51 to 100	Moderate
101 to 200	Unhealthy
201-300	Very Unhealthy

Pollutant levels measured at five monitoring sites were used for AQI reporting in 2008. The AQI pollutants measured at those sites are as follows:

Site Location	AQI Pollutants Monitored
Brown University, 10 Prospect Street, Providence	Sulfur Dioxide
Myron Francis School, 64 Bourne Avenue, E. Providence	Ozone Carbon monoxide
Alton Jones Campus of URI, Victory Highway. Greenwich	Ozone PM-2.5
US EPA Research Laboratory 72 Tarzwell Drive, Narragansett	Ozone PM-2.5
Urban League 212 Prairie Avenue, Providence	PM-2.5

Note that nitrogen dioxide concentrations are not used to calculate the AQI because there currently is no short-term air quality standard for that pollutant. PM-10 levels are also not used, because the monitoring results for those pollutants are not available the day after the samples are taken. Similarly, PM-2.5 concentrations measured using the filter-based Federal Reference Method are not used for calculating the AQI because those values are not immediately available; only PM-2.5 concentrations measured by continuous instruments are used for the AQI.


In 2008, the AQI in Rhode Island was good on 74% of the reporting days, moderate on 23% and unhealthy on 2%. (see Figure V). A daily air quality report is available on the RI DEM web site at <http://www.dem.ri.gov/programs/benviron/air/pm.htm>. Additional information on the AQI and the health effects associated with various index levels is available from the OAR.

2008 AIR QUALITY SUMMARY

The summer of 2008 began with temperatures cooler than normal. In mid- July, the temperatures increased, but weather conditions tended to be cloudy and wet with winds predominantly from the west. Since ozone concentrations in Rhode Island are highest on hot sunny days with winds are from the southwest, ozone levels were lower in 2008 than in previous years. Reduced emissions of ozone precursors in Rhode Island and upwind states may also have contributed to lower ozone concentrations. The current 8-hour ozone standard (0.075 ppm) was exceeded on six days in 2008, as compared to seventeen days in 2007. Ambient concentrations of the other criteria pollutants continued to comply with the National Ambient Air Quality Standards (NAAQS).

A more detailed discussion of the properties of the criteria pollutants, the concentrations of pollutants measured in 2008 and ambient air quality trends follows.

Figure V
Air Quality Index (AQI)
2008 Air Quality Levels

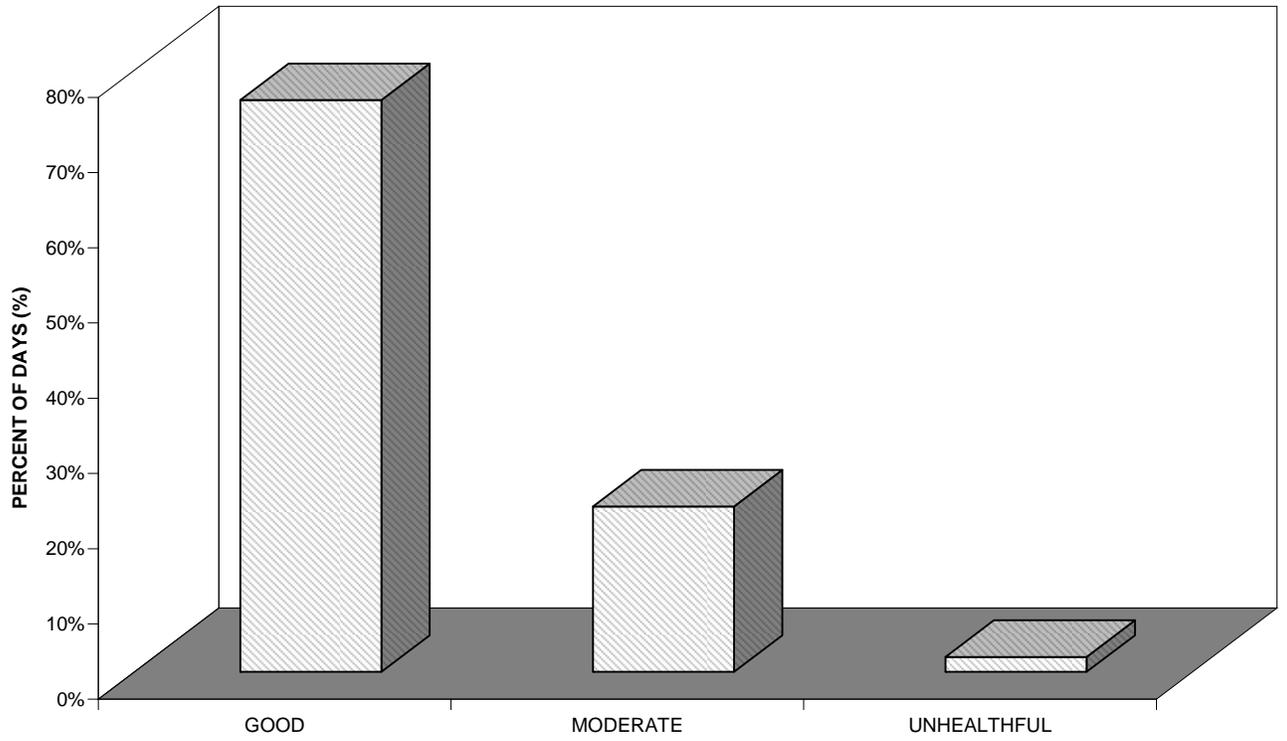

CARBON MONOXIDE (CO)

Carbon monoxide (CO) is a colorless, odorless, poisonous gas formed by the incomplete combustion of fuels in motor vehicles, aircraft, boilers, power plants, incinerators, industrial processes and other fuel-burning sources. Elevated CO levels in outdoor air are most often found in downtown areas with heavy traffic and poor dispersion characteristics.

By binding to the hemoglobin in blood, CO reduces the amount of oxygen that is delivered to the body's organs and tissues. CO exposure is most dangerous to those who suffer from cardiovascular disease. Healthy individuals are also affected at higher concentrations. Exposure to elevated CO levels can cause shortness of breath, chest pain, headache, confusion, visual impairment, reduced work capacity, reduced coordination, poor learning ability, and difficulty in performing complex tasks.

The primary and secondary NAAQS for CO are the same, 9 ppm as an 8-hour average and 35 ppm as a 1-hour average. Those standards have not been exceeded in Rhode Island since 1984. In 2008, CO was measured at one site in the State, the Francis School in East Providence.

On October 17, 2006, the US EPA revised its ambient air monitoring regulations, removing specifications concerning the minimum number of CO monitors required for each state. In response to this amendment, RI DEM evaluated the usefulness of the data collected at the Rhode Island CO monitoring sites to determine whether continued operation of two monitors was justified. RI DEM concluded that the utility of the CO data collected at those sites was limited, due to the following factors:

- No exceedances of the CO NAAQS have been observed in the State for more than 20 years;
- Current CO levels are significantly below the NAAQS;
- All CO readings in the past five years have been in the "good" air quality category, and thus measurements have not provided useful health related information for the AQI; and
- Due to the trend toward lower emissions from motor vehicles, it is very unlikely that CO levels will increase significantly in the coming years.

In consideration of those factors, RI DEM discontinued operation of the CO monitor at the Dorrance Street, Providence site at the end of June 2007. RI DEM continues to operate the CO monitor at the East Providence site because that site is part of the US EPA's Photochemical Assessment Monitoring Sites (PAMS) network and will, in the future, be part of the US EPA's Network of Core Multipollutant Monitoring sites (NCore).


Since the Dorrance Street site, which is no longer operational, had been used to track maintenance of the CO NAAQS in Providence, the US EPA required the RI DEM to develop alternative methods to track CO levels to ensure continued compliance with the NAAQS. A revision to the Rhode Island State Implementation Plan was submitted to the US EPA in September 2008 that delineates the methods that will be used to track CO levels in the Providence area to ensure that those levels do not exceed the NAAQS in the future.

In 2008, the highest CO concentrations recorded were 11% and 4.6% of the 8-hour and 1-hour NAAQS respectively, (See Table 3). Figure VI shows CO trends in Rhode Island between 1992 and 2008. CO concentrations decreased substantially in that period. That trend continued in 2008; the maximum 8-hour average CO concentration at the East Providence site was lower in 2008 than in 2007.

Table 3 Carbon Monoxide (CO) Levels Measured in Rhode Island in 2008 (ppm)

Stations	1-Hour Values (NAAQS is 35 ppm)			8-Hour Values (NAAQS is 9 ppm)			
	# of Observations	1 st Maximum	2 nd Maximum	# of Exceedances	1 st Maximum	2 nd Maximum	# of Exceedances
Francis School 64 Bourne Ave. E. Providence	7,847	1.6	1.5	0	1.0	1.0	0
Totals				0			0

Figure VI
CARBON MONOXIDE (CO)
Maximum 8-Hour Concentrations
 Standard = 9 ppm

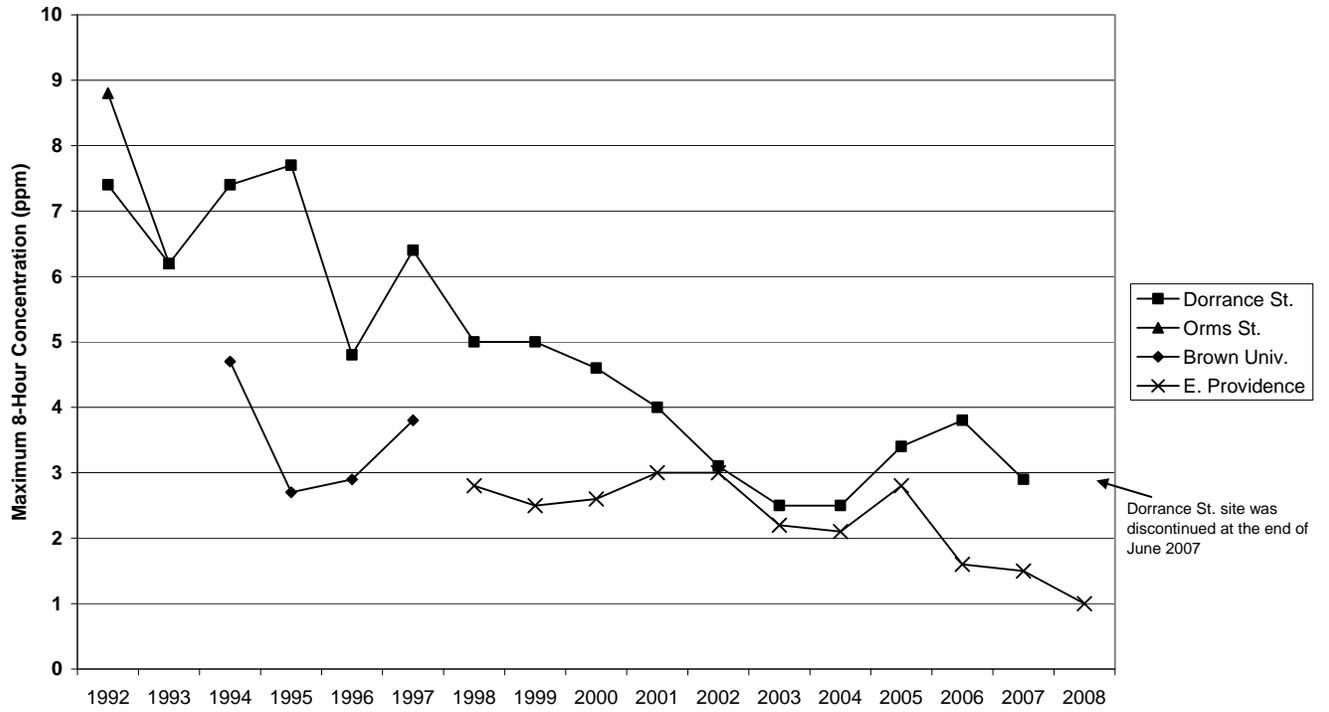

LEAD (Pb)

Rhode Island does not currently monitor for lead as a criteria pollutant because, since the removal of lead from gasoline, airborne lead concentrations in the State have been substantially lower than the NAAQS for that pollutant. Note, however, that the US EPA adopted a considerably more stringent NAAQS for lead in October 2008 and Rhode Island will be required in the future to conduct monitoring to ascertain that lead levels in the State do not exceed the revised standard.

Lead can enter the body through inhalation of lead dust or fumes and by ingestion of lead paint chips and lead-contaminated dust, water, soil, or food. Lead accumulates in blood, bone, and soft tissue. Fetuses and small children are particularly susceptible to the toxic effects of lead, which include brain damage, behavioral alterations, decreased intelligence and slowed growth. At higher levels, exposure to lead can damage the kidneys, liver, and nervous system, and cause reproductive disorders and anemia.

In October 2008, the US EPA's health-based NAAQS for lead was changed to 0.15 $\mu\text{g}/\text{m}^3$ as a rolling three-month average measured in Total Suspended Particulate (TSP), a level that is ten times more stringent than the standard it replaced. Since Rhode Island does not currently measure lead levels in TSP, no data are available to definitively determine whether the ambient air in the State is in compliance with that standard.

However, as part of the air toxics program, Rhode Island measures lead in PM-10, the fraction of TSP that is 10 micrometers or smaller, at the Urban League monitoring site in Providence. The highest 3-month average concentration of lead in PM-10 measured at that site in the most recent 3-year period, 2006-2008, was 0.0075 $\mu\text{g}/\text{m}^3$, which is 5% of the new NAAQS. Therefore, TSP lead levels would have to be 20 times higher the lead levels in PM-10 for the Providence site to violate the NAAQS.

Rhode Island measured lead in both PM-10 and TSP at the Urban League site in 2001 and 2002. During that period, 3-month average TSP lead levels were no more than twice as high as the PM-10 lead levels. Therefore, it is unlikely that TSP lead levels at that site are currently twenty times higher than the PM-10 lead levels and, thus, would exceed the new standard. Further, since there are no significant lead emissions sources in the State, it is unlikely that lead levels in other areas of the State are substantially higher than at the Providence site. Therefore, RI DEM expects that the lead in TSP measurements which will be initiated, as required, by January 2011, will show that Rhode Island is in attainment of the updated NAAQS

As discussed above, lead is one of the metals monitored in PM-10 at the Urban League site in Providence as part of the National Air Toxics Trends Sites (NATTS) network. In addition, lead in fine particulate matter (PM-2.5) was measured at Urban League site in 2008 on a one-in three day schedule as part of the national PM-2.5 Speciation program. A summary of Rhode Island PM-10 and PM-2.5 metals data is included in the Air Toxics section of this document.

NITROGEN DIOXIDE (NO₂) and OXIDES of NITROGEN (NO_x)

Nitrogen dioxide (NO₂) belongs to a family of highly reactive gases called oxides of nitrogen (NO_x). NO_x forms when fuel is burned at high temperatures, and is found in the exhaust emitted by motor vehicles and stationary sources such as power plants and industrial boilers. A suffocating, brownish gas, NO₂ is a strong oxidizing agent that reacts in the air to form corrosive nitric acid, as well as toxic organic nitrates.

Breathing air with elevated NO₂ levels irritates the lungs and lowers the body's resistance to respiratory infections such as influenza. Continued or frequent exposure to high concentrations of NO₂ may cause acute respiratory illness in children. Emissions of NO₂, as well as other oxides of nitrogen (NO_x), contribute to the formation of ground level ozone and to other adverse environmental effects, such as acid rain and the eutrophication of coastal waters.

In 2008, Rhode Island monitored NO₂ and NO_x at three sites. The East Providence and West Greenwich NO₂/ NO_x monitors are located at Photochemical Assessment Monitoring Sites (PAMS). The PAMS network is designed to track the movement of ozone and its precursors (like NO_x) through the region, so NO_x monitoring at those locations is required only during June, July and August, when ozone levels tend to be highest. In keeping with that requirement, the NO₂/ NO_x monitors in West Greenwich and East Providence were operated from June through August in 2008. The monitor at the third site, which is located at Brown University in Providence, operated throughout the year.

The NAAQS for NO₂ is 0.053 ppm as an annual arithmetic mean. The NAAQS has not been exceeded in Rhode Island since monitoring for NO₂ began in 1980. In 2008, the annual arithmetic mean at the Brown University site was 0.0123 ppm, 23% of the NAAQS. There is no NAAQS for NO_x. 2008 NO₂ and NO_x levels are summarized in Tables 4 and 5, respectively.

As can be seen in Figure VII, NO₂ and NO_x levels in the State have declined over the past ten years. NO₂ and NO_x levels were both lower in 2008 than they were in 2007 and in previous years.

**Table 4 Nitrogen Dioxide (NO₂) Levels Measured in Rhode Island in 2008
(ppm)**


Stations	1-hour Values			Annual Mean (NAAQS = 0.053 ppm)	
	# of Observations	1 st Maximum	2 nd Maximum	Observed Mean	# of Exceedances
Alton Jones W. Greenwich	1,797	0.007	0.006	N/A*	N/A
Brown University 10 Prospect St. Providence	8,277	0.061	0.060	0.0123	0
Francis School 64 Bourne Ave. E. Providence	2,074	0.031	0.031	N/A*	N/A
Total					0

**Table 5 Levels of Oxides of Nitrogen (NO_x) Measured in Rhode Island in 2008
(ppm)**

Stations	1-hour Values			Annual Mean
	# of Observations	1 st Maximum	2 nd Maximum	
Alton Jones W. Greenwich	1,797	0.005	0.005	N/A*
Brown University 10 Prospect St. Providence	8,277	0.304	0.293	0.172
Francis School 65 Bourne Ave. E. Providence	2,074	0.069	0.063	N/A*

* N/A = Not applicable. The W. Greenwich and E. Providence NO₂/NO_x monitors are operated only in June, July and August. Since those monitors do not operate for the whole year, annual means can not be calculated for those sites.

Figure VII
NITROGEN DIOXIDE (NO₂) and OXIDES OF NITROGEN (NO_x)
Annual Average Concentrations at Brown University, Providence Site
NO₂ Standard = 0.053 ppm

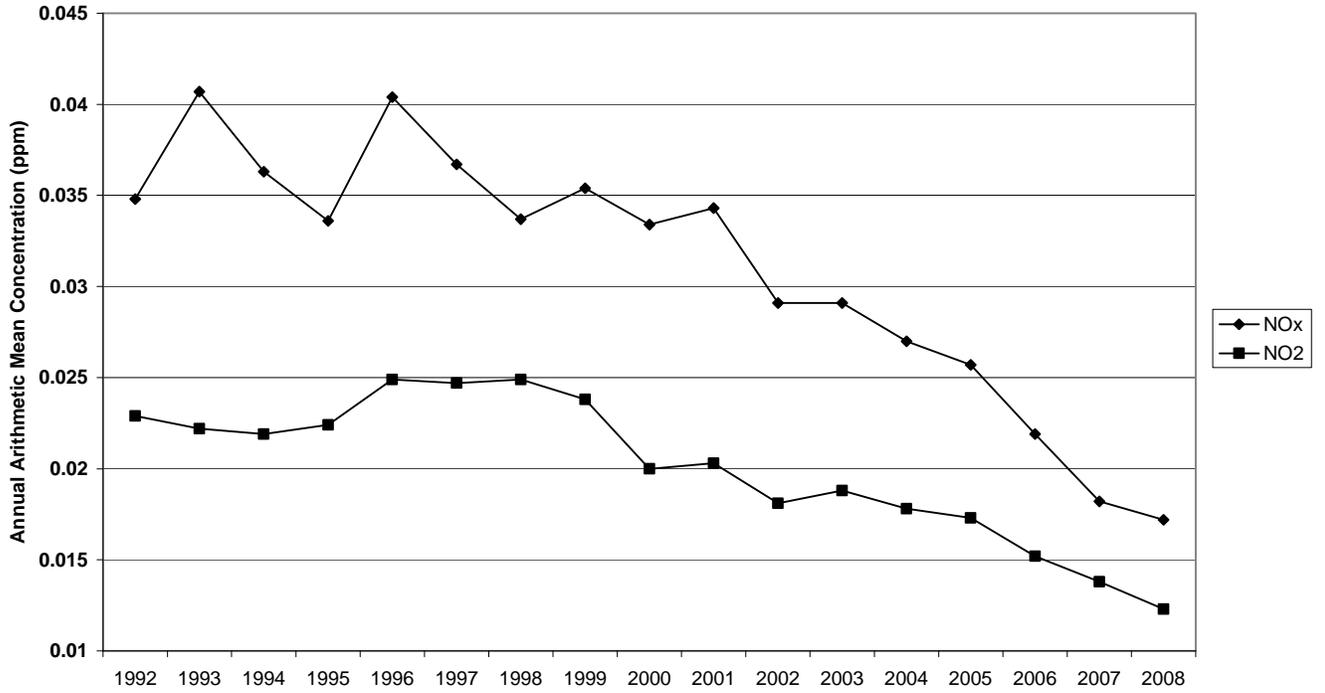

OZONE (O₃)

Ozone (O₃) is a photochemical oxidant which is the major component of smog. Elevated concentrations of ground level ozone are a major health and environmental concern. Ozone is formed in the atmosphere when volatile organic compounds (VOC) and oxides of nitrogen (NO_x) emitted by mobile and stationary sources react in the presence of elevated temperatures and sunlight; therefore, VOCs and NO_x are called “ozone precursors”.

Because airborne VOCs and NO_x, as well as ozone itself, are transported over long distances, sources emitting ozone precursors in states upwind of Rhode Island contribute to the State’s ozone problem. Ozone levels in Rhode Island generally are highest on hot sunny summer days when the winds are from the west or southwest. Rhode Island was classified as a serious nonattainment area for the one-hour average NAAQS for ozone and is classified as a moderate nonattainment area for the 1997 8-hour average ozone standard.

Exposure to elevated ozone levels causes eye, nose and throat irritation; coughing; chest pain; shortness of breath; decreased lung function; headache; and fatigue. Repeated exposures can increase susceptibility to respiratory infection and lung inflammation and can aggravate preexisting respiratory diseases, such as asthma. Long-term exposures can cause irreversible changes in the lungs, leading to chronic respiratory illnesses such as emphysema and chronic bronchitis and to premature aging of the lungs.

Children are at a high risk for ozone-related health effects because they have developing lungs and relatively high respiration rates and because they are often active outdoors during the summer months, when ozone levels are highest. Adults who work or exercise outside and people with respiratory and heart diseases are also at an increased risk. Elevated ozone levels also reduce agricultural and commercial forest yields; reduce the growth and survivability rates of tree seedlings; increase tree and plant susceptibility to disease, pests and other environmental stresses; and have long-term effects on forests and ecosystems.

In 1977 the US EPA determined that the one-hour average ozone NAAQS, 0.12 ppm, was not sufficiently stringent to protect public health and the environment and promulgated a new ozone standard of 0.08 ppm as an 8-hour average. The 8-hour standard was further strengthened to 0.075 ppm in May 2008. Although the 1-hour standard was revoked as of June 1, 2005 and is no longer effective in Rhode Island, one-hour average ozone concentrations are shown in Table 6a for information purposes.

Ozone monitors were operated at three Rhode Island sites, the Alton Jones campus of the University of Rhode Island in West Greenwich, the Francis School in East Providence and the US EPA Laboratory in Narragansett, during the 2008 ozone season (April – September 2008). The 8-hour ozone NAAQS (0.075 ppm) was exceeded at one or more of the Rhode Island sites on six days in 2008: June 10 and 14th and July 17, 18, 19 and 26th. Exceedances were recorded on two days at the West Greenwich site and four days at

the East Providence and Narragansett sites. The highest 8-hour concentration, which was recorded at the Narragansett site, was 0.089 ppm, 119% of the NAAQS. 2008 8-hour average ozone levels are summarized in Table 6b.

A monitor is in violation of the current 8-hour ozone NAAQS if the average of the fourth highest daily maximum 8-hour concentrations for each year in a three-year period, the design value, is greater than 0.075 ppm. Rhode Island design values for the 2006 – 2008 period are 0.081 ppm for the West Greenwich site, 0.082 for the East Providence site and 0.082 ppm for Narragansett. Although none of these values violate the 1977 8-hour ozone standard, which was exceeded when a design value was 0.085 ppm or higher, all of the design values exceed the revised 8-hour ozone NAAQS of 0.075 ppm.

Although there has been a general downward trend over the past 20 years in the number of days per year that exceed the current 0.075 ppm ozone standard, the number of exceedances in any given year are highly weather-dependent (see Figure IX). As discussed above, the 2008 weather pattern, with initial cool temperatures followed by cloudy, wet conditions, contributed to a reduced number of high ozone days in 2008 as compared to in previous years.


**Table 6a One-Hour Average Ozone Levels Measured in Rhode Island in 2008 (ppm)
(No NAAQS)**

Stations	# of Observations	1st Maximum	2 nd Maximum	3 rd Maximum	4 th Maximum
Alton Jones W. Greenwich	182	0.109	0.092	0.092	0.090
Francis School 10 Prospect St. E. Providence	179	0.103	0.099	0.096	0.095
EPA Laboratory 27 Tarzwell Dr. Narragansett	182	0.104	0.102	0.095	0.095

**Table 6b Eight-Hour Average Ozone Levels Measured in Rhode Island in 2008
(ppm) (NAAQS = 0.075 ppm)**

Stations	# of Observations	1st Maximum	2 nd Maximum	3 rd Maximum	4 th Maximum	# of Exceedances
Alton Jones W. Greenwich	181	0.086	0.082	0.074	0.074	2
Francis School 10 Prospect St. E. Providence	175	0.088	0.086	0.085	0.077	4
EPA Laboratory 27 Tarzwell Dr. Narragansett	179	0.089	0.086	0.082	0.081	4
Total						10

Figure VIII
OZONE (O3)
Exceedances of the 2008 8-Hour Ozone Standard
 8-Hour Standard = 0.075 ppm

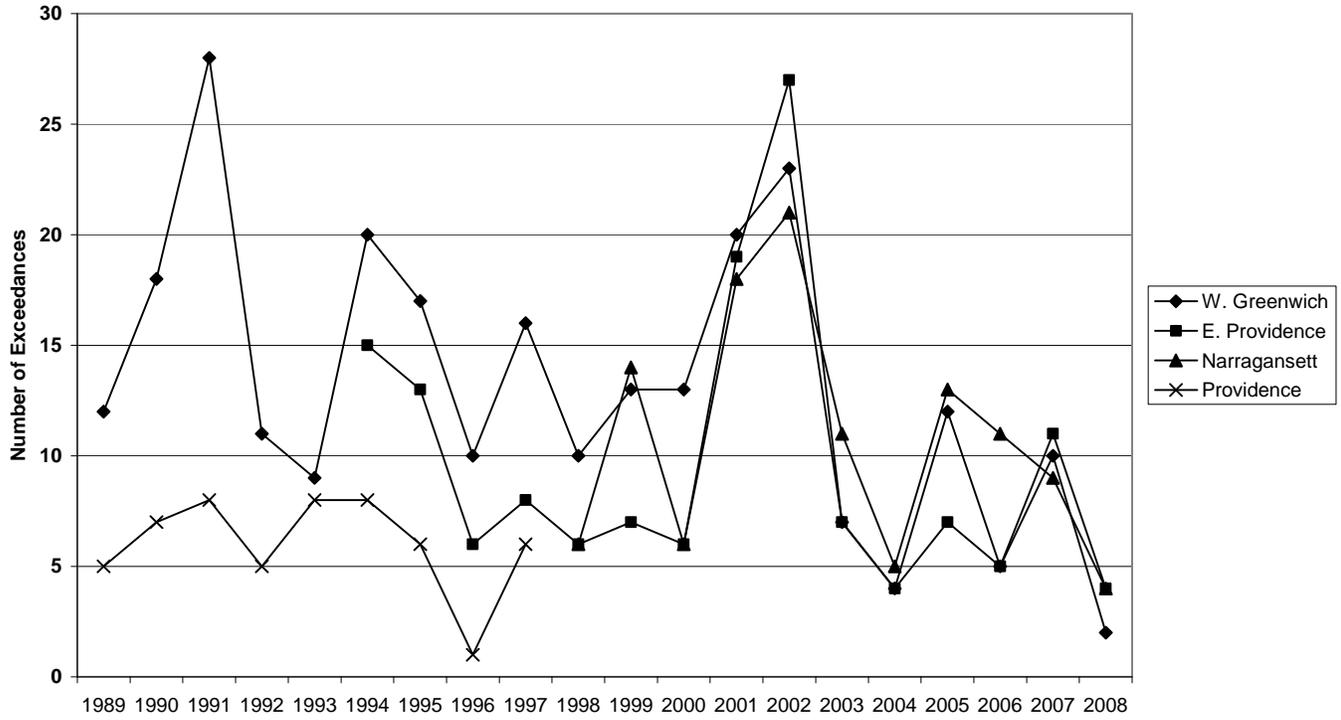

PARTICULATE MATTER

Airborne particulate matter (PM) is emitted by mobile and stationary sources, including diesel trucks, wood stoves, power plants, and industrial processes, as well as by natural occurrences and human activities. Primary PM is emitted directly from sources, while secondary PM is formed in the atmosphere as the product of chemical reactions between gaseous pollutants. The chemical and physical compositions of airborne particles vary widely.

The NAAQS for PM focus on small particles, because small particles, when inhaled, travel to the lower regions of the respiratory tract and can cause significant respiratory and cardiovascular health effects. The PM-10 standard regulates particles with diameters of 10 micrometers (one-seventh the width of a human hair) or less and the PM-2.5 or fine particulate standard regulates particles with diameters equal to or smaller than 2.5 micrometers.

Exposure to PM is linked to a variety of health effects, including coughing, difficult or painful breathing, chronic bronchitis, aggravated asthma, increased respiratory-related hospital admissions and emergency room visits, and premature death. The elderly, children, and people with heart or lung diseases like emphysema, bronchitis and asthma are at particular risk for those effects. Airborne PM also impairs visibility and can soil and damage materials.

Rhode Island has monitored PM-10 since 1985 and PM-2.5 since 1999.

PM-10

In 2008, Rhode Island operated a network of four PM-10 monitoring sites: the Johnson and Wales library on Dorrance Street in downtown Providence; the Vernon Street, Pawtucket site adjacent to Route I-95; the Urban League building in urban South Providence and at the Alton Jones campus of the University of Rhode Island in West Greenwich, a background rural site. PM-10 samples collected at Urban League, which is the State's NATTS site, are analyzed for metals; metals results are discussed in the air toxics section of this document.

The NAAQS for PM-10 is $150 \mu\text{g}/\text{m}^3$ as a 24-hour average. That standard is exceeded if the fourth highest 24-hour concentration recorded at a site in a three year period (the design value for the site) is higher than $150 \mu\text{g}/\text{m}^3$. The annual average NAAQS for PM-10 ($50 \mu\text{g}/\text{m}^3$) was revoked by the US EPA effective December 2006. The PM-10 standard has never been exceeded in Rhode Island since PM-10 monitoring began in 1985. As is shown in Table 7a, the maximum 24-hour PM-10 concentration in 2008, which was measured at both the Vernon Street site and Dorrance Street, was $42 \mu\text{g}/\text{m}^3$, 28% of the NAAQS, and the maximum annual average PM-10 concentration, recorded at the Pawtucket site, was $20.3 \mu\text{g}/\text{m}^3$, 41% of the revoked NAAQS.

Figures IX and X show the annual average concentration and 24-hour design value concentration for PM-10 levels, respectively, measured in the past ten years. Until 2002, the highest PM-10 values in the State were recorded at a monitor on Allens Avenue in Providence, immediately adjacent to Route I-95 in Providence. That site reflected worst-case PM-10 levels and was not representative of neighborhood exposures. Monitoring at the Allens Avenue site was discontinued in 2002 due to extensive construction and demolition activity in the area associated with a highway relocation project.

Since the discontinuation of monitoring at the Allens Avenue site, the highest annual mean and 24-hour design value PM-10 concentrations in the State often occur at the Vernon Street, Pawtucket site, which is adjacent to Rte. I-95 in Pawtucket. In 2008, the annual mean PM-10 concentration at the Vernon Street site was 2 - 4 $\mu\text{g}/\text{m}^3$ higher than at the two other urban sites and nearly 6 $\mu\text{g}/\text{m}^3$ higher than at the rural site in W. Greenwich. The 2006 - 2008 24-hour design value for PM-10 was also highest at the Vernon Street site; the design value at that site was 2 $\mu\text{g}/\text{m}^3$ higher than at the Dorrance Street site, 10 $\mu\text{g}/\text{m}^3$ higher than at the Urban League site and 18 $\mu\text{g}/\text{m}^3$ higher than that in W. Greenwich. Note, however, that the highest 24-hour design value recorded, 44 $\mu\text{g}/\text{m}^3$, was only 29% of the NAAQS.

As can be seen in Figures IX and X, annual and 24-hour average PM-10 concentrations at the Rhode Island sites have gradually decreased over the past ten years. In 2008, the annual average levels at all four of the sites were slightly higher in 2008 than in the previous year. The 24-hour design values for 2008 at all four sites were lower than in the previous year.

Table 7a PM-10 Concentrations in Rhode Island in 2008($\mu\text{g}/\text{m}^3$)
NAAQS = 150 $\mu\text{g}/\text{m}^3$ (24-hour average)

Stations	24-hour Values						Annual Mean
	# Of Observations	1st Maximum	2nd Maximum	3 rd Maximum	4th Maximum	# of Exceedances	
Vernon St. Pawtucket	57	42	40	39	38	0	20.3
Alton Jones W. Greenwich	52	36	24	22	20	0	10.6
212 Prairie Ave. Providence	56	41	34	26	25	0	16.4
111 Dorrance St. Providence	53	42	40	39	28	0	18.1
Totals						0	

**Figure IX
PARTICULATE MATTER (PM-10)
Annual Average Concentrations**


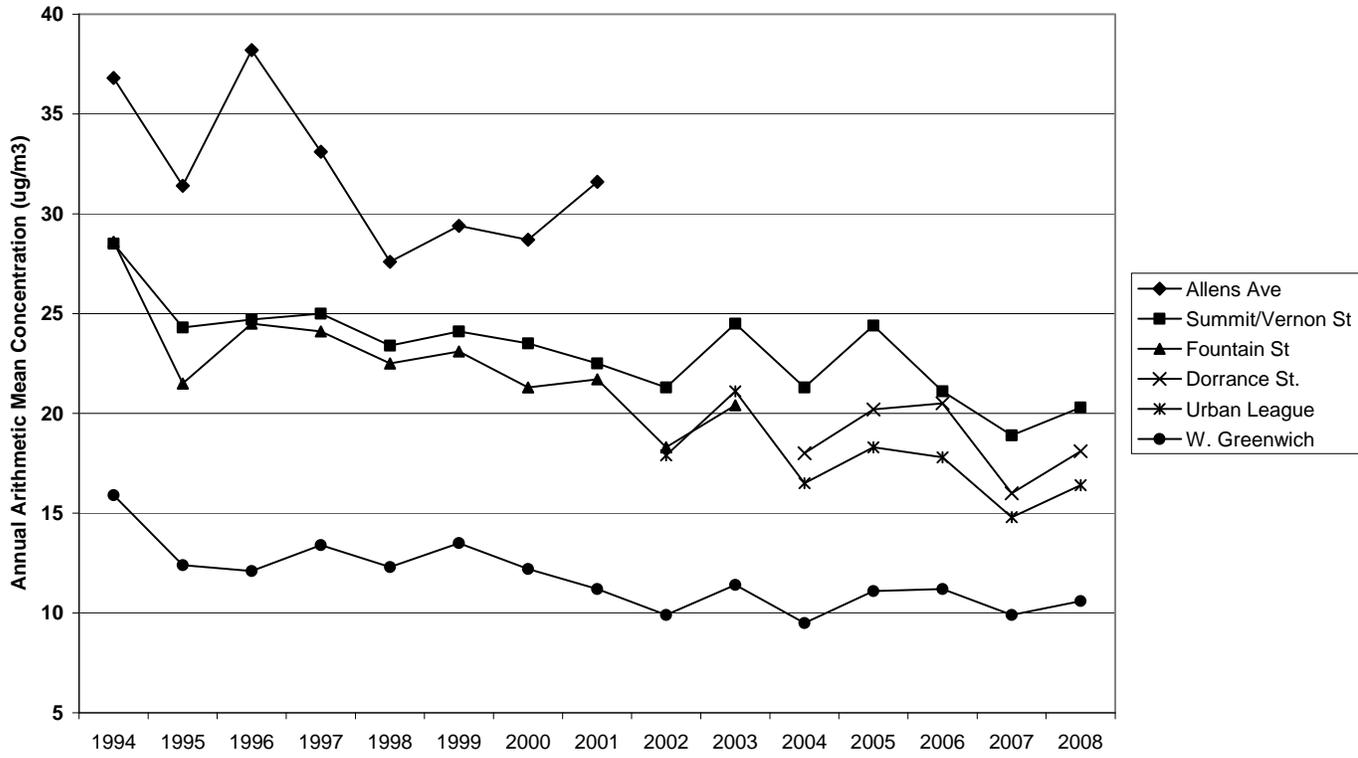


Figure X
PARTICULATE MATTER (PM-10)
24-Hour Design Value
 Standard = 150 ug/m3

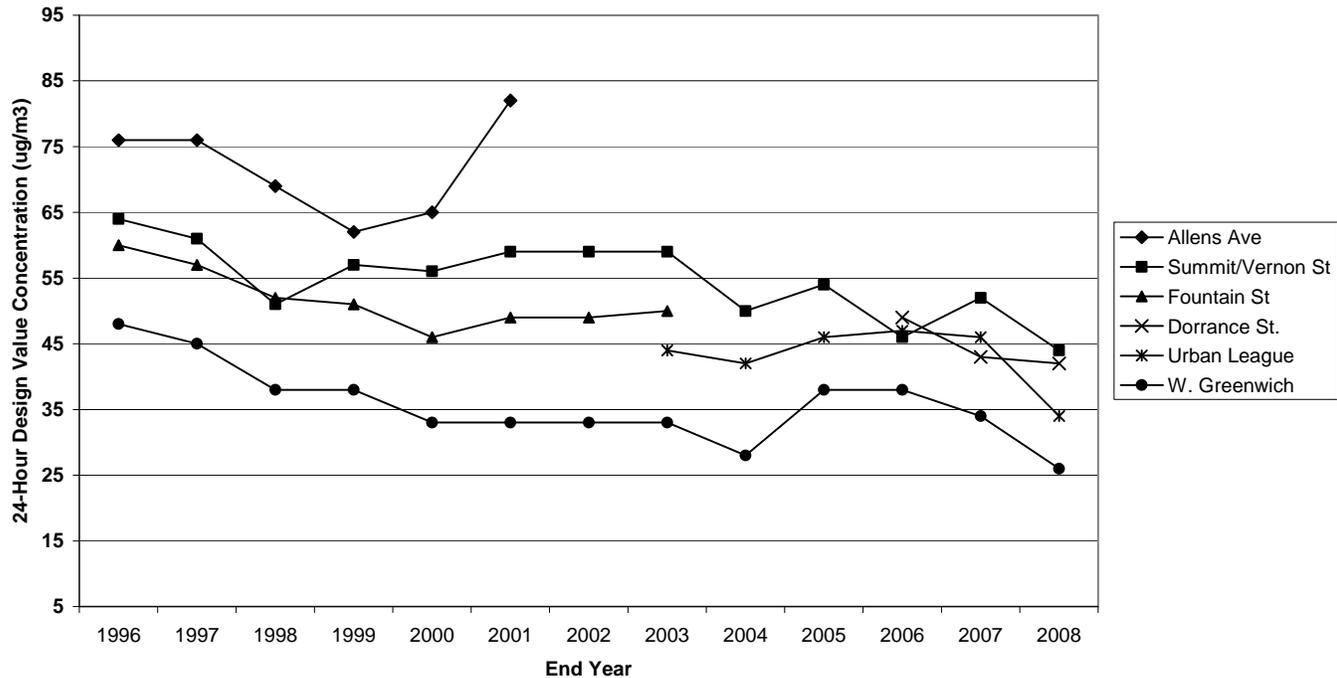

FINE PARTICULATE MATTER (PM-2.5)

As discussed above, the US EPA promulgated an NAAQS for PM-2.5 in July 1997. In 1999, RI DEM began operating a network of PM-2.5 monitors to determine whether Rhode Island was in compliance with that standard. The 24-hour PM-2.5 NAAQS was updated in December 2006.

PM-2.5 was measured at five sites in the State in 2008. Urban core sites, which reflect population exposure in urban areas, are located at the Urban League building on Prairie Avenue in Providence; at the Vernon Street site in Pawtucket, adjacent to Route I-95; at the Hallmark building on Eddy Street in Providence and at the Francis School in East Providence, which is in a suburban neighborhood frequently downwind of the Providence metropolitan area. A background/transport rural site is located at the Alton Jones campus of the University of Rhode Island in West Greenwich. PM-2.5 samples are collected daily at the Urban League and East Providence sites and every 3rd day at the other sites. The West Greenwich, Pawtucket, and Urban League sites are also PM-10 sites.

Rhode Island also operates Beta Attenuation Monitors (BAMs), which are continuous PM-2.5 monitors, at three sites - the Urban League site in Providence, the West Greenwich site and the US EPA laboratory in Narragansett, a coastal site where ozone is

also measured. The BAMs used at the Narragansett and Providence sites in 2008 were not considered a Federal Equivalent Method (FEM), and, thus, the data produced by those monitors cannot be used for determining compliance with the NAAQS. However, the continuous monitors provide vital real-time data important for forecasting PM-2.5 levels, for issuing health alerts, for calculating the AQI and for tracking hourly PM-2.5 levels. The West Greenwich BAM was upgraded to FEM status in November 2008.

Speciated PM-2.5 levels have been measured in Rhode Island since June 2002. Speciated PM-2.5 samples were collected at the East Providence site every 6th day from June 2002 until May 2004. Speciation sampling at the Urban League site began in June 2002 on the same one in six day schedule, but the frequency was increased to one in three days in May 2004, when the East Providence speciation measurements were discontinued. Speciation monitors provide data on the composition of PM-2.5; that information is useful for identifying sources and for characterizing the toxicity of this pollutant.

In 2006, the US EPA reduced the 24-hour average NAAQS for PM-2.5 from 65 $\mu\text{g}/\text{m}^3$ to 35 $\mu\text{g}/\text{m}^3$. A monitor is in attainment of that NAAQS if the 98th percentile value of the 24-hour average concentrations measured at the site does not exceed that level. The annual average NAAQS for PM-2.5, 15 $\mu\text{g}/\text{m}^3$, was not changed. In 2008, the 98th percentile 24-hour concentrations at all of the Rhode Island sites were below the new 24-hour PM-2.5 standard. The annual average concentrations were also below the NAAQS. As can be seen in Table 7b, in 2008 the highest 98th percentile 24-hour concentration, recorded at the Vernon Street site, was 24.8 $\mu\text{g}/\text{m}^3$, 71% of the new NAAQS, and the highest annual average, which was also recorded at the Vernon Street site, was 10.66 $\mu\text{g}/\text{m}^3$, 71% of the annual NAAQS.

Although the 2006 PM-2.5 24-hour NAAQS, 35 $\mu\text{g}/\text{m}^3$, is considerably more stringent than the previous value, a number of experts recommended adoption of an even more stringent standard, e.g. 30 $\mu\text{g}/\text{m}^3$, to protect sensitive members of the public. In addition, many experts recommended that the US EPA substantially reduce the annual NAAQS. As discussed above, Rhode Island is in attainment of the NAAQS; however, on some days elevated levels of PM-2.5 occur that may pose health threats to sensitive individuals. In 2008, no PM-2.5 levels above the 35 $\mu\text{g}/\text{m}^3$ NAAQS were recorded, but levels at or above 30 $\mu\text{g}/\text{m}^3$ were recorded at one or more sites on four days. Unlike ozone, elevated PM-2.5 levels occur in the cooler months as well as during the summer.

The annual average PM-2.5 level at the Vernon street site in 2008 was 1 – 2 $\mu\text{g}/\text{m}^3$ higher than at the other urban core sites and 3 $\mu\text{g}/\text{m}^3$ higher than at the rural site in W. Greenwich. The 2008 98th percentile 24-hour concentration at Vernon Street was similar to those at the other urban core sites and 4 $\mu\text{g}/\text{m}^3$ higher than the level at the rural site.

As can be seen in Figure XI, annual average PM-2.5 concentrations at the Rhode Island sites have been consistently lower than the annual average NAAQS since measurement of that pollutant began in 1999 and have shown a slight downward trend in that period. The 24-hour concentrations measured since 1999 at all of the currently operating sites, except

at the Vernon Street site in 2003, have been below the new short-term PM-2.5 standard, as shown in Figure XII.

Table 7b PM-2.5 Concentrations in Rhode Island in 2008 (ug/m3)
2008 NAAQS = 35 ug/m3 (24-hour average), 15ug/m3 (annual mean)
FRM (Federal Reference Method) DATA SUMMARY

Stations	24-hour Values							Annual Mean
	# of Observations	1 st Maximum	2 nd Maximum	3 rd Maximum	4 th Maximum	98 th Percentile	# of Exceedances of 2007 24-hr NAAQS	
Francis School E. Providence	342*	32.2	32.0	31.9	27.7	24.1	0	9.02
Vernon St Pawtucket	117**	27.9	27.5	24.8	23.8	24.8	0	10.66
Alton Jones W. Greenwich	96**	30.7	20.5	20.0	19.6	20.5	0	7.61
Prairie Avenue Providence	334*	33.3	31.5	31.2	30.1	24.4	0	9.08
695 Eddy St Providence	104**	29.3	29.2	23.9	21.6	23.9	0	9.61

*Samples collected daily at this site.

**Samples collected every 3rd day at this site.

Figure XI
FINE PARTICULATE MATTER (PM-2.5)
Annual Average Concentrations
Standard = 15 ug/m³


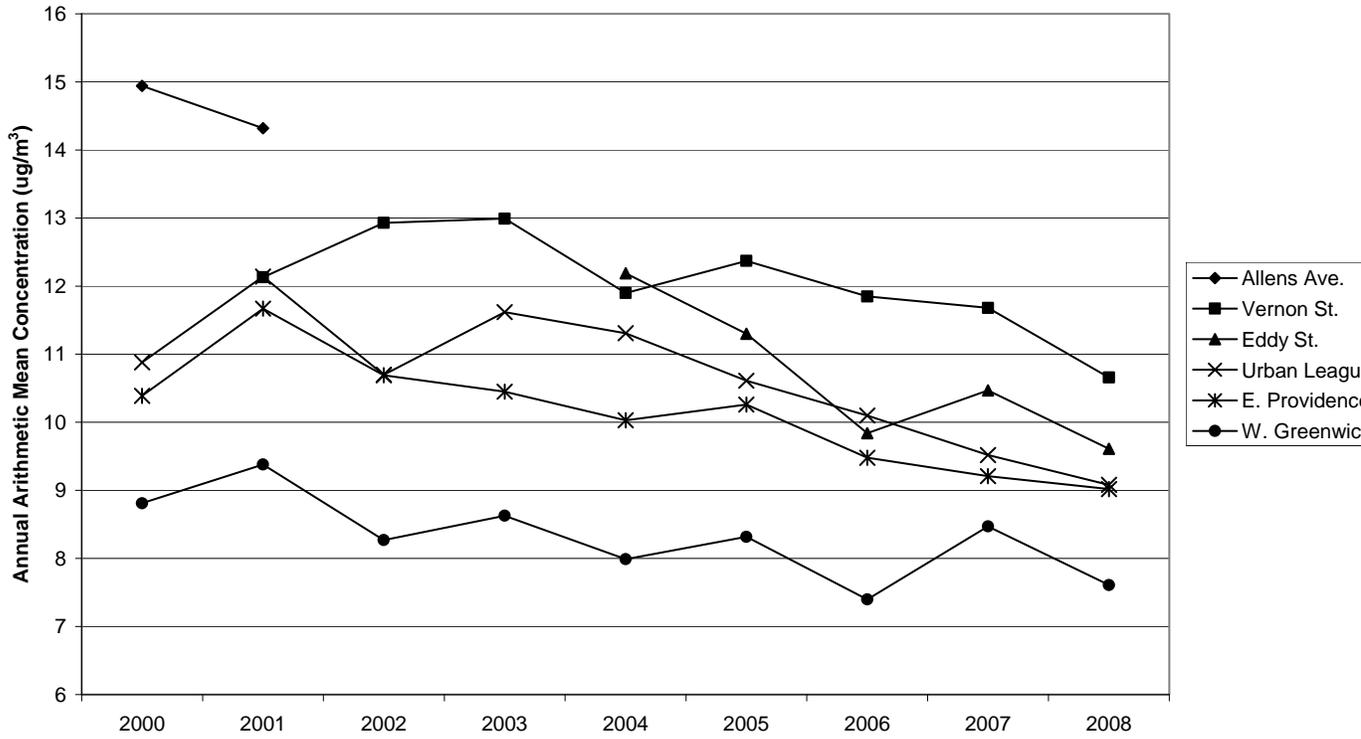


Figure XII
FINE PARTICULATE MATTER (PM-2.5)
24-Hour Concentrations (98th percentile)
2008 Standard = 35 ug/m³

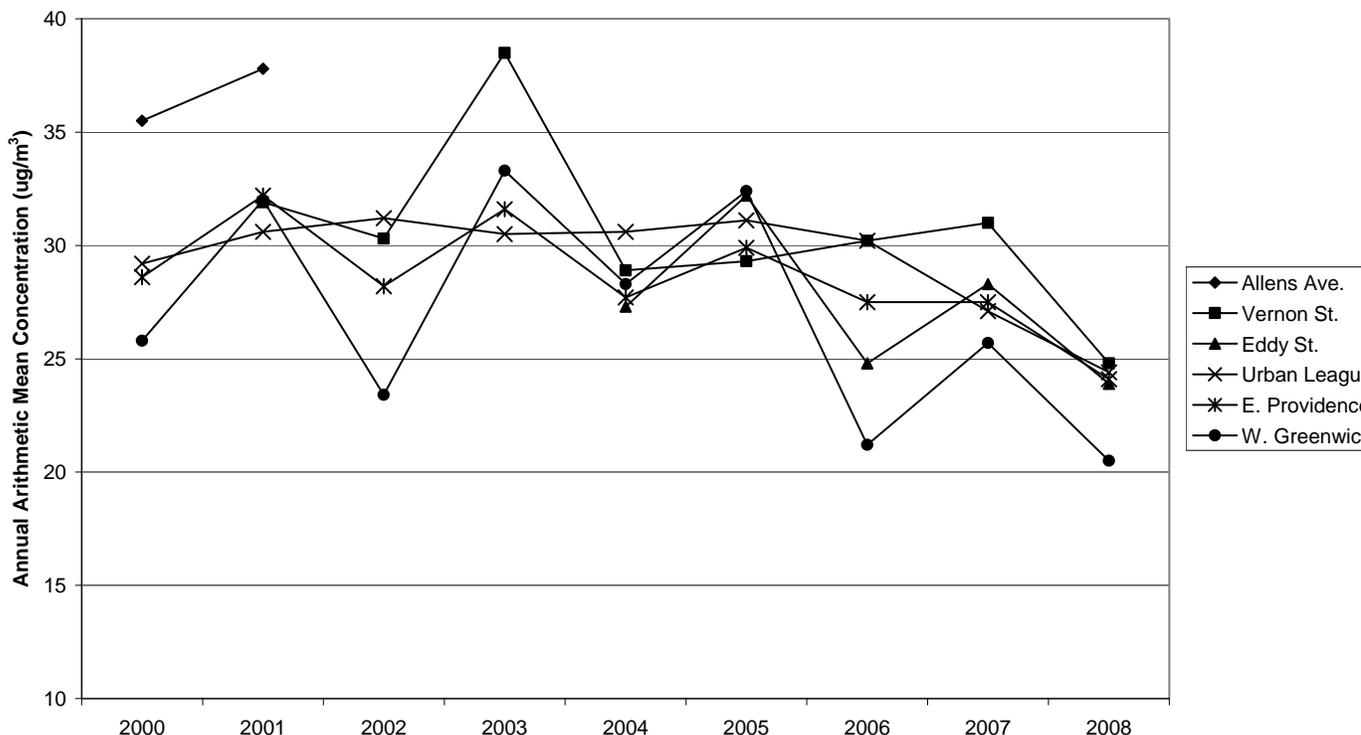

PM-coarse

In 2007, Rhode Island began operating a low-volume PM-2.5 Federal Reference Method (FRM) monitor that had been modified so that it now measures PM-10 at the Urban League site. Operation of that monitor, alongside a non-modified PM-2.5 FRM monitor, allows RI DEM to calculate concentrations of PM-coarse, particulate matter with diameters between 2.5 and 10 microns, as the difference between the low-volume PM-10 and the low-volume PM-2.5 measurements during the same 24-hour period. Currently, there is no NAAQS for PM-coarse, but, since health effects have been linked to exposure to PM in that size category, a standard may be promulgated in the future.

In the first two years of operation, the PM-10 concentrations measured by the low-volume monitor correlated well with and were, on average, approximately 1.5 µg/m³ higher than the concentrations measured by the high volume PM-10 sampler at that site. The average PM-2.5 concentration at the Urban League site was approximately 55% of the low-volume PM-10 concentration, so the PM-coarse fraction accounted for, on average, approximately 45% of the low-volume PM-10 levels.

SULFUR DIOXIDE (SO₂)

Sulfur dioxide (SO₂) is emitted primarily by sources burning fossil fuels to produce heat or electricity. Exposure to high concentrations of SO₂ causes respiratory illness, alterations in pulmonary defenses, and aggravation of existing cardiovascular disease. Children, the elderly, and people with asthma, cardiovascular disease or chronic lung disease such as bronchitis or emphysema are most susceptible to the adverse health effects of SO₂.

SO₂ combines with water in the atmosphere to form sulfates, which can cause acidification of lakes and streams, accelerated corrosion of buildings and monuments, reduced visibility, and adverse health effects.

The primary (health-based) NAAQS for SO₂ are 0.03 ppm as an annual arithmetic mean and 0.14 ppm as a 24-hour average. The US EPA has also set a secondary NAAQS for SO₂, 0.50 ppm as a three- hour average, to protect the environment, property, and aesthetics. The State of Rhode Island has been in compliance with these standards since monitoring began in 1975.

In 2008, SO₂ was monitored at one site, Brown University's Rockefeller Library in Providence. As with CO, RI DEM discontinued monitoring for this pollutant at the Dorrance Street site in downtown Providence at the end of June 2007 because concentrations had been consistently below the NAAQS since measurements began, current levels were significantly below the NAAQS, and, since all SO₂ readings in the last five years were in the "good" air quality range, those measurements did not provide useful health related information for the AQI. RI DEM will begin monitoring low-range levels of SO₂ at its NCORE site in East Providence by January 1, 2011.


In 2008, the annual average SO₂ concentration at the Brown University monitor was 0.0024 ppm, 8% of the NAAQS; the highest 24-hour concentration was 0.014 ppm, 10% of the NAAQS; and the highest 3-hour concentration was 0.022 ppm, 4% of the secondary NAAQS. (See Table 8)

Figure XIII shows annual arithmetic mean concentrations of SO₂ at Rhode Island monitoring sites between 1992 and 2008. Annual mean SO₂ concentrations have trended downward during that time period. This trend continued in 2008.

Table 8 Rhode Island 2008 Sulfur Dioxide (SO₂) Levels

Stations	1-Hour Values			3-Hour Values (NAAQS = 0.50 ppm)			24-hour Values (NAAQS = 0.14 ppm)			Annual Mean (NAAQS = 0.03 ppm)
	# of Observations	1st Maximum	2nd Maximum	1st Maximum	2nd Maximum	# of Exceed-ances	1st Maximum	2nd Maximum	# of Exceed-ances	
Brown Univer. 10 Prospect St. Providence	8,047	0.030	0.028	0.022	0.021	0	0.014	0.011	0	0.0024
Totals						0			0	

Figure XIII
SULFUR DIOXIDE (SO₂)
Annual Average Concentrations
Standard = 0.03 ppm

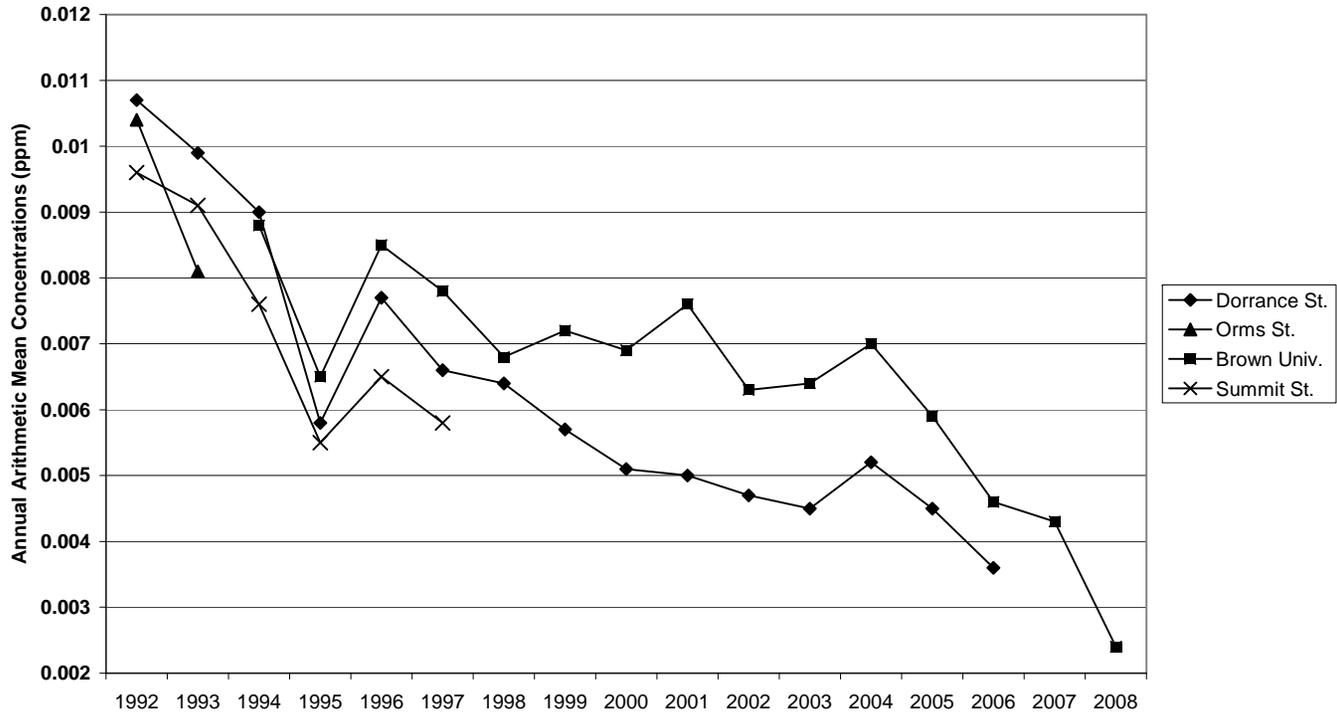

PHOTOCHEMICAL ASSESSMENT MONITORING STATIONS (PAMS)

Although ground-level ozone concentrations in Rhode Island have decreased over the past ten years, the State, as well as much of the rest of the Northeast, continues to violate the ozone NAAQS.

Ground level ozone is a regional problem; ozone precursors (NO_x and VOCs) emitted in one state can contribute to elevated ozone levels in states that are many miles downwind. The photochemical reactions involved in ozone formation are influenced by a number of factors, including the relative concentrations of various precursor chemicals in the atmosphere and a variety of meteorological parameters. Therefore, identifying emissions control strategies that effectively reduce ozone levels in nonattainment areas is a complex task.

In order to obtain ambient air quality data useful for evaluating such strategies, the Clean Air Act Amendments of 1990 (CAAA) required serious, severe and extreme ozone nonattainment areas to establish enhanced monitoring networks for ozone and ozone precursors. In response to that mandate, the US EPA promulgated rules in 1993 that required the establishment of a network of Photochemical Assessment Monitoring Stations (PAMS) to measure ozone, NO_x, VOCs (including carbonyls), and meteorological parameters in nonattainment areas.

Rhode Island's PAMS network consists of four sites: one Type 1 site, one Type 2 site, one Type 3 site and one Type 4 site. Type 1 sites are located upwind of nonattainment areas and are used to measure concentrations of ozone and ozone precursors in air masses entering the area. Type 2 sites are located immediately downwind of the area of maximum precursor emissions, which in Rhode Island is the Providence metropolitan area. Type 3 sites are located 10-30 miles downwind of the urban area, and are used to track the movement of precursor pollutants and the resulting formation of ozone. Type 4 sites are located further downwind, and are used to track pollutants leaving the area.

Two of Rhode Island's PAMS sites are located within the State boundaries; the Type 1 site at the Alton Jones campus of the University of Rhode Island in West Greenwich and the Type 2 site at the Francis School in East Providence. Due to the proximity of the Providence metropolitan area to the Massachusetts border, the Type 3 and 4 sites are located in Massachusetts. In 2008, those sites were located on the Blue Hill in Milton, Massachusetts and in Truro, Massachusetts, respectively.

At the West Greenwich Type I PAMS site, 24-hour VOC samples are collected every sixth day year round. At the Type 2 site in East Providence, eight three-hour VOC samples are collected daily and eight three-hour carbonyl samples are collected every third day during June, July and August, while 24-hour VOC and carbonyl samples are collected every sixth day year round. AT the two sites in Massachusetts eight three-hour VOC samples are collected every day during June, July and August.

VOC samples are analyzed for approximately 90 substances which are ozone precursors and/or air toxics. The carbonyl samples are analyzed for formaldehyde, acetaldehyde and acetone. Ozone, NOx and surface meteorological conditions are also measured at the PAMS sites during the summer months. PAMS monitoring began at the East Providence site in 1994 and at the West Greenwich site in 1995.

The data from the Rhode Island PAMS sites, combined with results from similar sites in other states, are used to identify sources of ozone precursors, to track migration of those pollutants, to determine the concentrations of various toxic air pollutants in the region, to track changes in ambient levels over time, and to verify the inputs and results of regional ozone modeling.

AIR TOXICS

Many of the substances measured at the PAMS sites are air toxics as well as ozone precursors. Since the PAMS sites have operated for over a decade, data from those sites provide useful information about trends in ambient air toxics levels in Rhode Island. In addition, RI DEM has operated an air toxics monitoring site at the Urban League in Providence since May 2001; that site became a National Air Toxics Trends Site (NATTS) in 2002. The Urban League site is in an urban residential area that is not immediately impacted by localized industrial or commercial sources. In addition to VOCs and carbonyls, black carbon, PM-10, PM-10 metals, hexavalent chromium (Cr VI), semi-volatile compounds (SVOC) PM-2.5, PM-coarse and speciated PM-2.5 are monitored at that site. VOCs have also been monitored at the Vernon Street, Pawtucket site, adjacent to I-95, since 2001.

VOCs

One of the toxics measured in VOC samples is benzene, a gasoline constituent known to cause leukemia in humans. The average benzene concentrations measured at the PAMS and toxics sites for the years 1995 –2008 are displayed in Figure XIV. Benzene levels dropped sharply between 1995 and 1996, probably due to the implementation of rules requiring the sale of reformulated gasoline with a reduced benzene content in late 1995. In the succeeding years, ambient benzene levels have shown a gradual downward trend. However, in 2008, the average benzene levels at the Vernon Street, Pawtucket and Urban League, Providence sites were slightly higher than in the previous year, while the level at the West Greenwich site was roughly equivalent to that in the previous year.

Due to the ubiquitous nature of motor vehicle traffic, benzene, as well as other components of motor vehicle exhaust, such as the carcinogen 1,3-butadiene, are present in the ambient air throughout the State. However, the concentrations of those pollutants are significantly higher in urban and highly trafficked areas than in more rural sections of the State. As can be seen in Figure XV, the average concentration of benzene in 2008 at the suburban East Providence site was one and one-half times that at the rural site in West Greenwich. The average benzene concentrations at the urban Providence site was twice as high as at the rural site and the level at the Pawtucket site, which is in a residential area next to the highway, was two and one-half times that at the rural site.

Intrastate variations in concentrations were even more substantial for 1,3-butadiene. The 2008 average 1,3-butadiene concentration at the East Providence site was twice as high as that in West Greenwich. The average concentration of 1, 3-butadiene at the urban Providence site was nearly three times higher and at the Pawtucket site near the highway was four and one-half times higher than at the rural site in West Greenwich.

Similarly, as shown in Figures XVI, the concentration of the industrial cleaning solvent trichloroethylene was substantially higher at the East Providence suburban site than at the West Greenwich rural site and was higher still at the urban sites. Ambient trichloroethylene levels in Rhode Island have declined over the past several years,

consistent with declines in the use of that solvent by Rhode Island industry over that period. However, average concentrations of trichloroethylene at all sites were slightly higher in 2008 than in the previous year.

Levels of perchloroethylene, a solvent used by dry cleaners and in industrial settings, were also substantially higher at the more urban sites, as shown in Figure XVII. Unlike trichloroethylene, however, ambient perchloroethylene levels have not shown a significant decline in recent years.

Figure XIV
BENZENE
Annual Average Concentrations

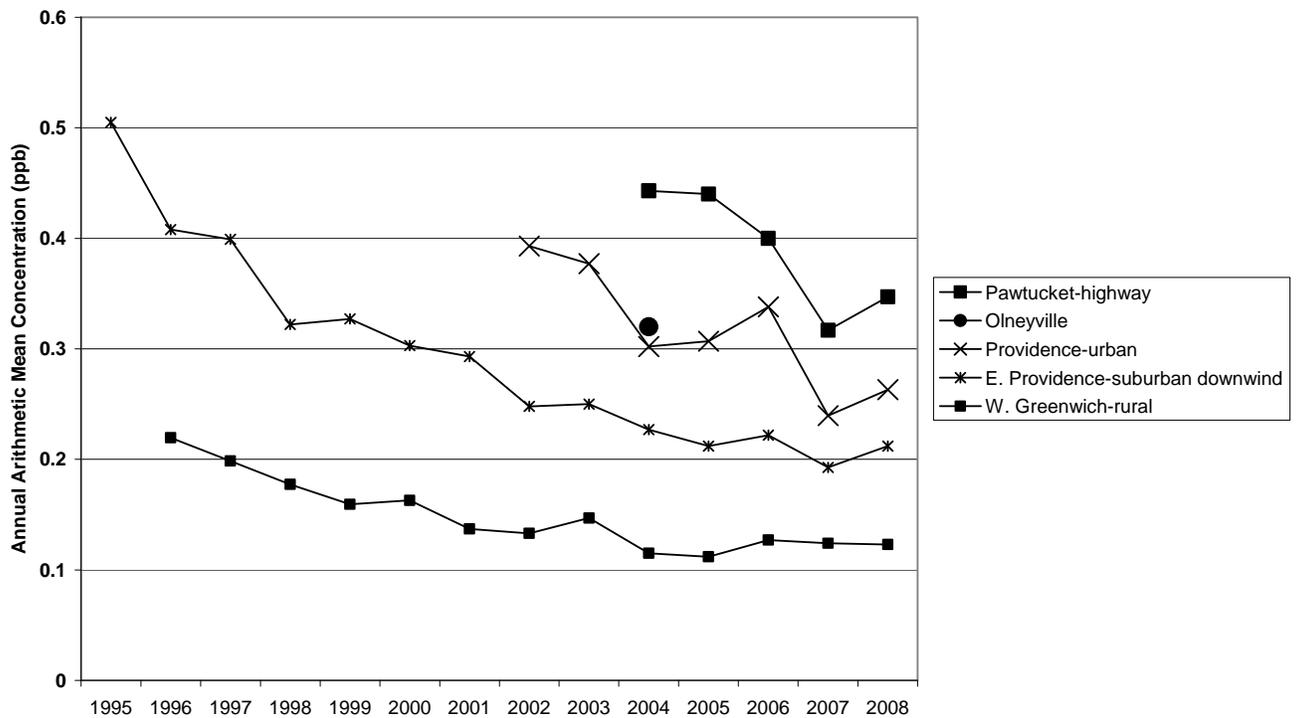


Figure XV
MOBILE SOURCE TOXIC VOLATILE ORGANICS
2008 Annual Mean Concentrations

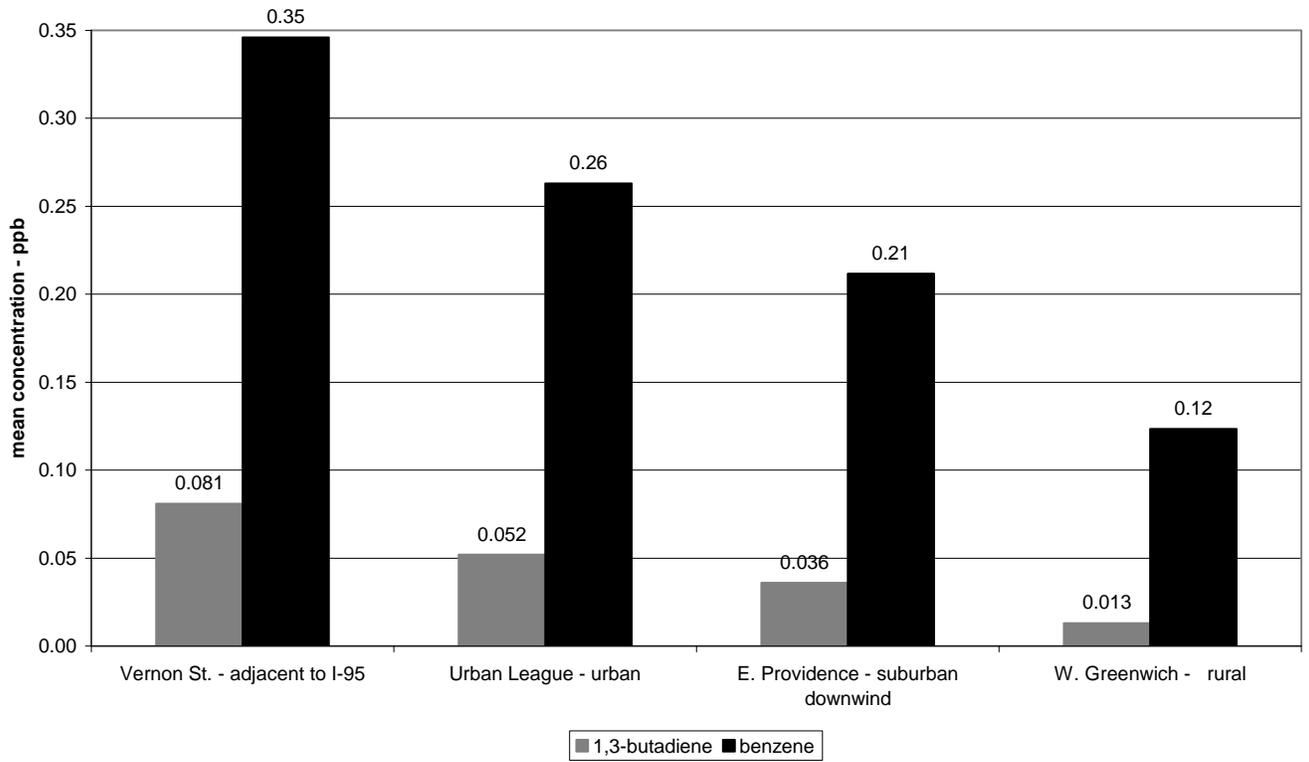


Figure XVI Trends in Annual Average Trichloroethylene Levels


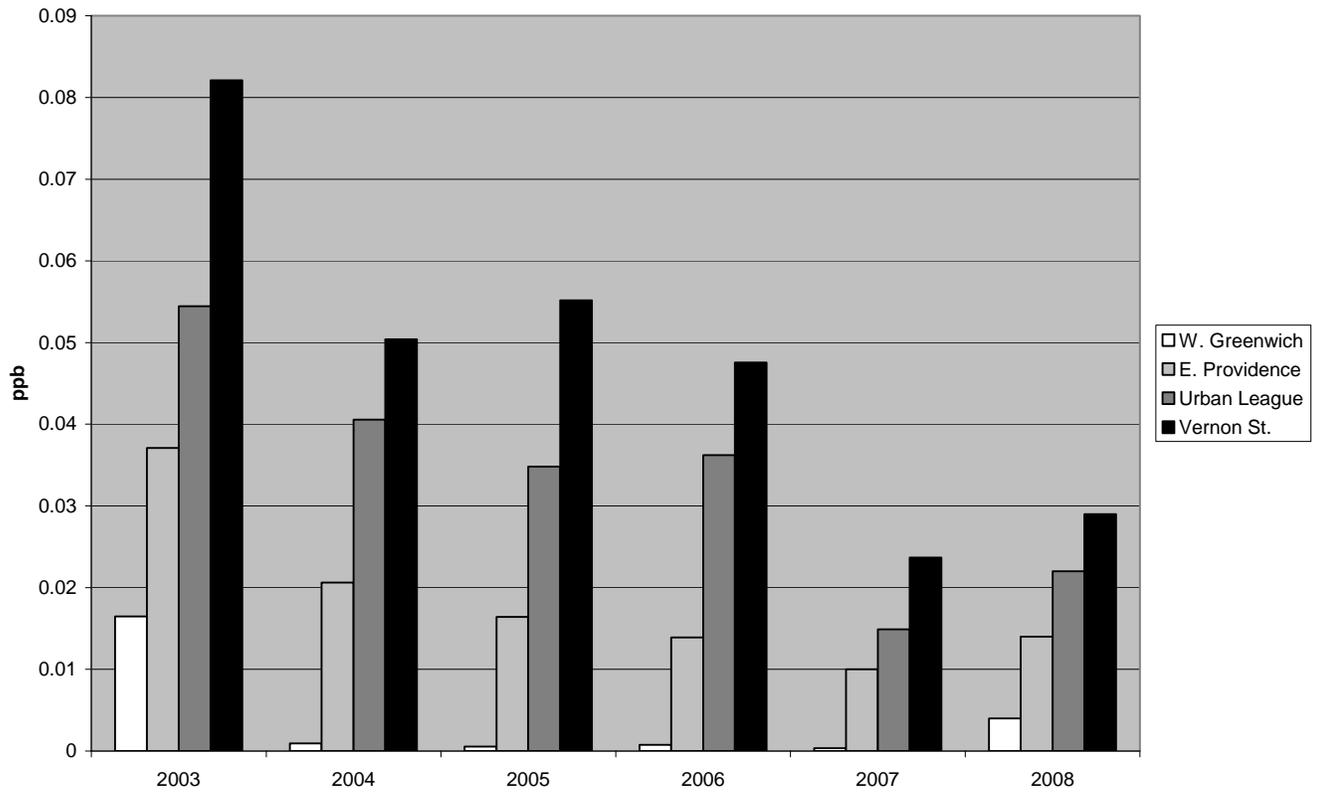



Figure XVII Trends in Annual Average Perchloroethylene Levels

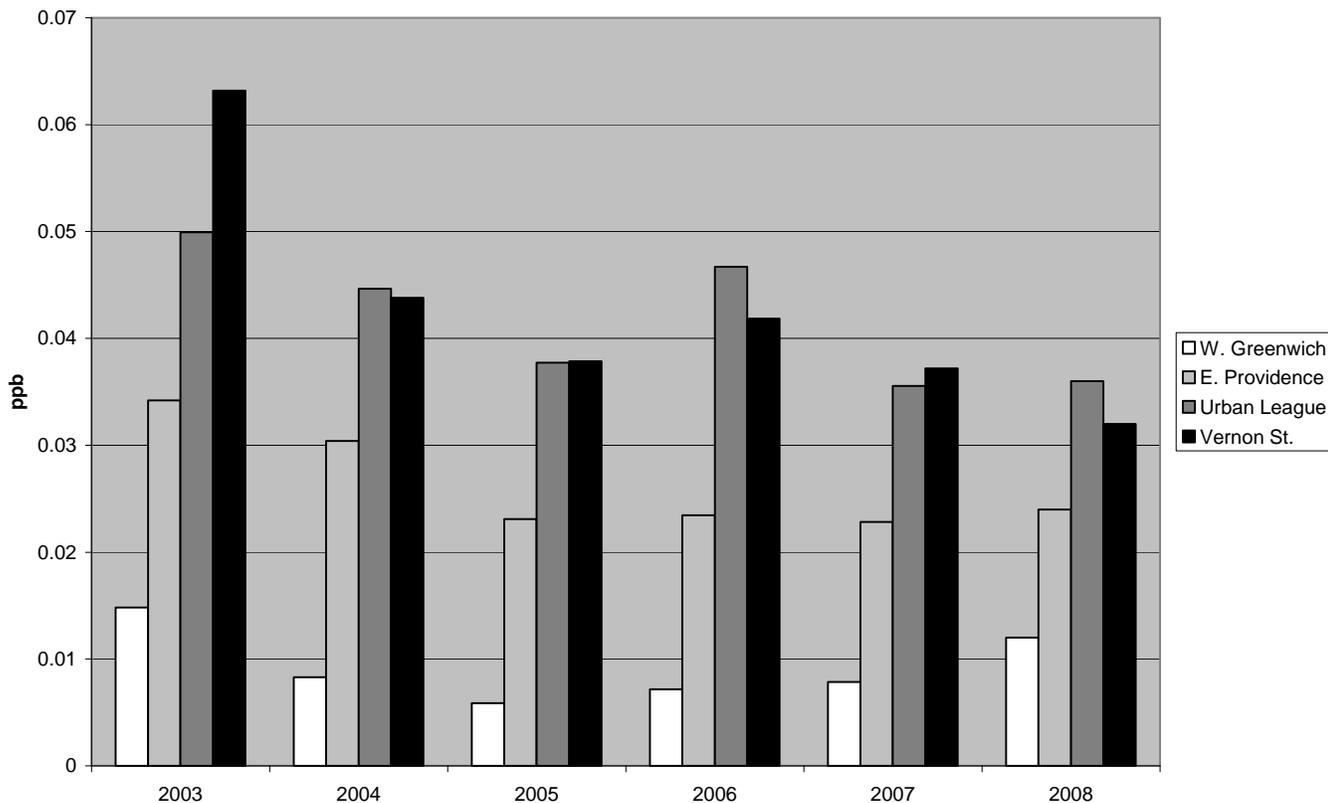

Carbonyls

Average ambient concentrations of the carbonyl compounds formaldehyde and acetaldehyde at the East Providence site for 1995 –2008 and at the Urban League site for 2002- 2008 are displayed in Figure XVIII. Carbonyls are emitted by combustion sources and, like ozone, are also formed via photochemical reactions in the atmosphere. Therefore, carbonyl levels tend to be highest in the summer and average carbonyl concentrations in years with hot summers tend to be higher than those in cooler years. The carbonyl levels measured to date do not show a clear trend. Average levels of both formaldehyde and acetaldehyde in 2008 were higher than in 2007 at the E. Providence site. At the Providence site, the average acetaldehyde level was higher and the average formaldehyde level similar to the 2007 levels.

**Figure XVIII
CARBONYLS
Annual Average Concentrations**

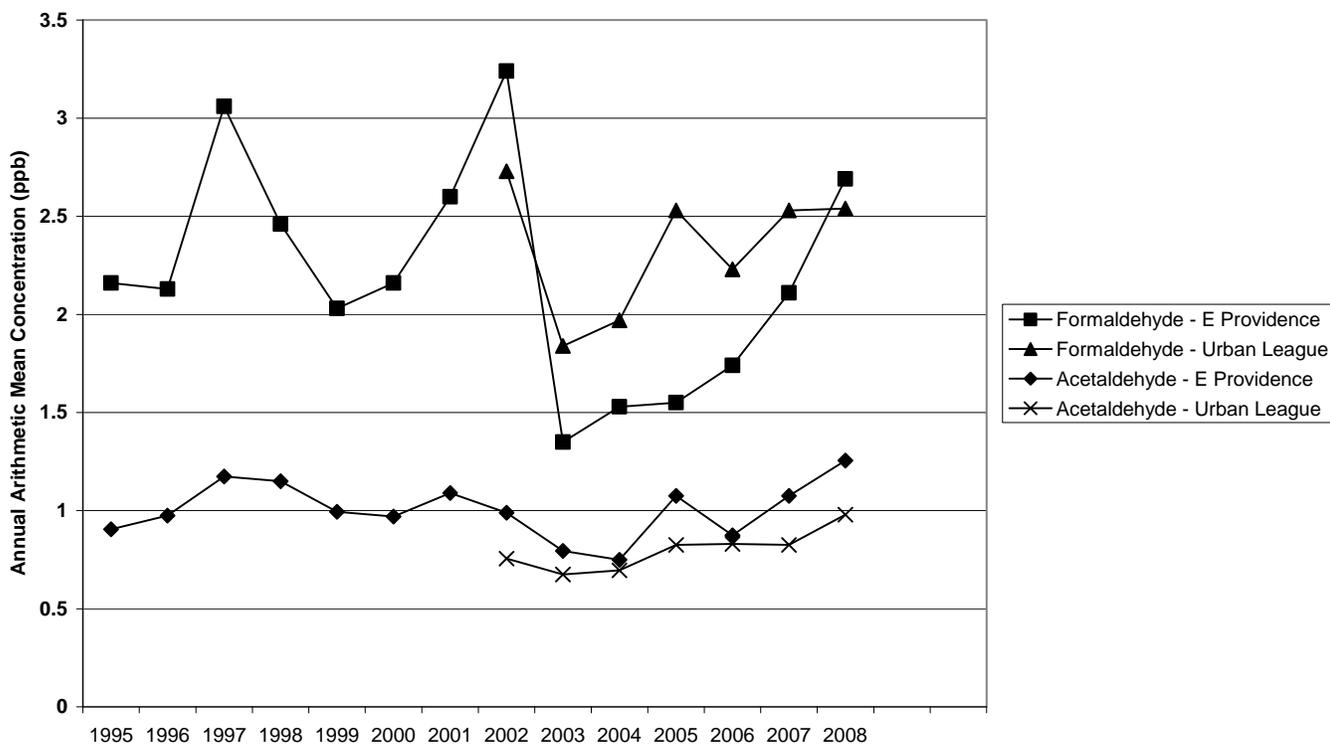

Metals

At the Urban League NATTS site, RI DEM collects hi-volume PM-10 samples every sixth day and analyzes those samples for eight metals. Previously, that analysis was performed by the US EPA Region I laboratory but, in 2008, the metals analysis was conducted by the Rhode Island Department of Health Laboratories. One of the metals, beryllium, was not detected in the 2008 samples. The remaining metals, antimony, arsenic, cadmium, chromium, lead, manganese and nickel, were detected in most of the samples.

Since 2005, RI DEM has also sampled for hexavalent chromium (chromium VI) in total suspended particulate matter (TSP) samples collected at the Urban League site. Those samples are analyzed by a US EPA contractor. Chromium VI, the most toxic form of chromium, is a human carcinogen. The contractor was not able to detect chromium VI in the 2008 Rhode Island samples at the detection limit for the method used (0.00001 $\mu\text{g}/\text{m}^3$).

The average concentrations of the detected metals in the Urban League PM-10 samples are shown in Table 9. Also listed in that table are health benchmarks for those metals.

The health benchmarks for arsenic, cadmium, chromium VI, lead and nickel correspond to a lifetime cancer risk of one in one million and the health benchmarks for antimony chromium III and manganese were developed by the US EPA to protect against non-cancer effects.

Table 9 Rhode Island 2008 Metals Levels

	2008 Mean ($\mu\text{g}/\text{m}^3$)	Health Benchmark ($\mu\text{g}/\text{m}^3$)
Antimony (PM-10)	0.000806	0.2
Arsenic (PM-10)	0.000518	0.0002
Cadmium (PM-10)	0.000092	0.0006
Chromium (PM-10)	0.001399	5,000 (Chromium III)
Lead (PM-10)	0.00356	0.08
Manganese (PM-10)	0.003244	0.05
Nickel (PM-10)	0.001448	0.004

For all of the metals listed in Table 9 except arsenic, the average concentrations measured were lower than the corresponding health benchmark, and thus would not be likely to present a significant health risk. The arsenic concentration measured was approximately twice the benchmark, and thus long-term exposure to that level would be associated with an increased cancer risk of a approximately two in one-million..

As part of the federal PM-2.5 speciation program, a number of metals were also measured in PM-2.5 in 2008. The methods used to measure metals in PM-10 and in PM-2.5 were not the same, so the concentrations cannot be definitively compared. However, it is interesting to note that, on days in 2008 that metals results for both PM-2.5 and PM-10 are available, the lead concentration in PM-2.5 was, on average, 68% of that in PM-10, the PM-2.5 manganese concentration was 30% of that in PM-10 and the PM-2.5 nickel concentration was 100% of that in PM-10. Therefore, lead and nickel were predominantly present in fine particles, while manganese was more highly concentrated on coarser particles (particles with diameters between 2.5 and 10 micrometers).

Black Carbon

Black carbon, an indicator of diesel exhaust, has been measured at the Francis School, East Providence and Urban League, Providence sites since 2005 using a continuous reading instrument. As shown in Figure XIX, annual average black carbon concentrations are higher at the Providence site than at the East Providence site, although the difference between the levels at the two sites has decreased every year since 2005. The concentrations at both sites appear to show a downward trend between 2006 and 2008.

As can be seen in Figure XX, black carbon concentrations are highly dependant on wind direction. At the East Providence site, black carbon levels are, on average, highest when the wind is from the west or southwest, when the site is downwind of the Providence metropolitan area. Under those wind conditions, average black carbon levels are higher at the East Providence site than at the urban Providence site.

As shown in Figure XXI, average black carbon levels peak between 7:00 and 8:00 AM on week days, due to high traffic activity and meteorological conditions that limit dilution of pollutants. Concentrations are considerably lower during the daytime hours on weekends than during the work week.

Figure XIX Black Carbon Concentration - Annual Average

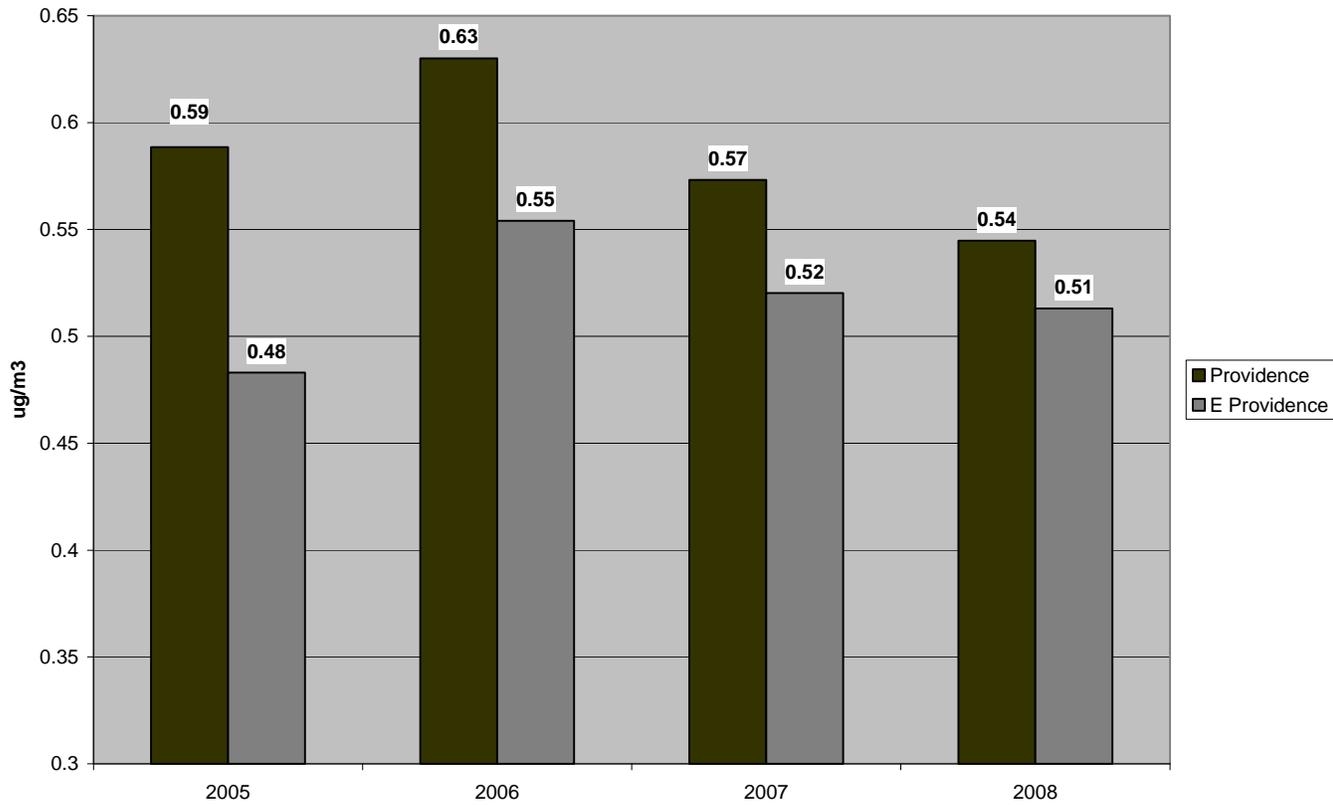


Figure XX 2008 Average Black Carbon Concentration by Wind Direction


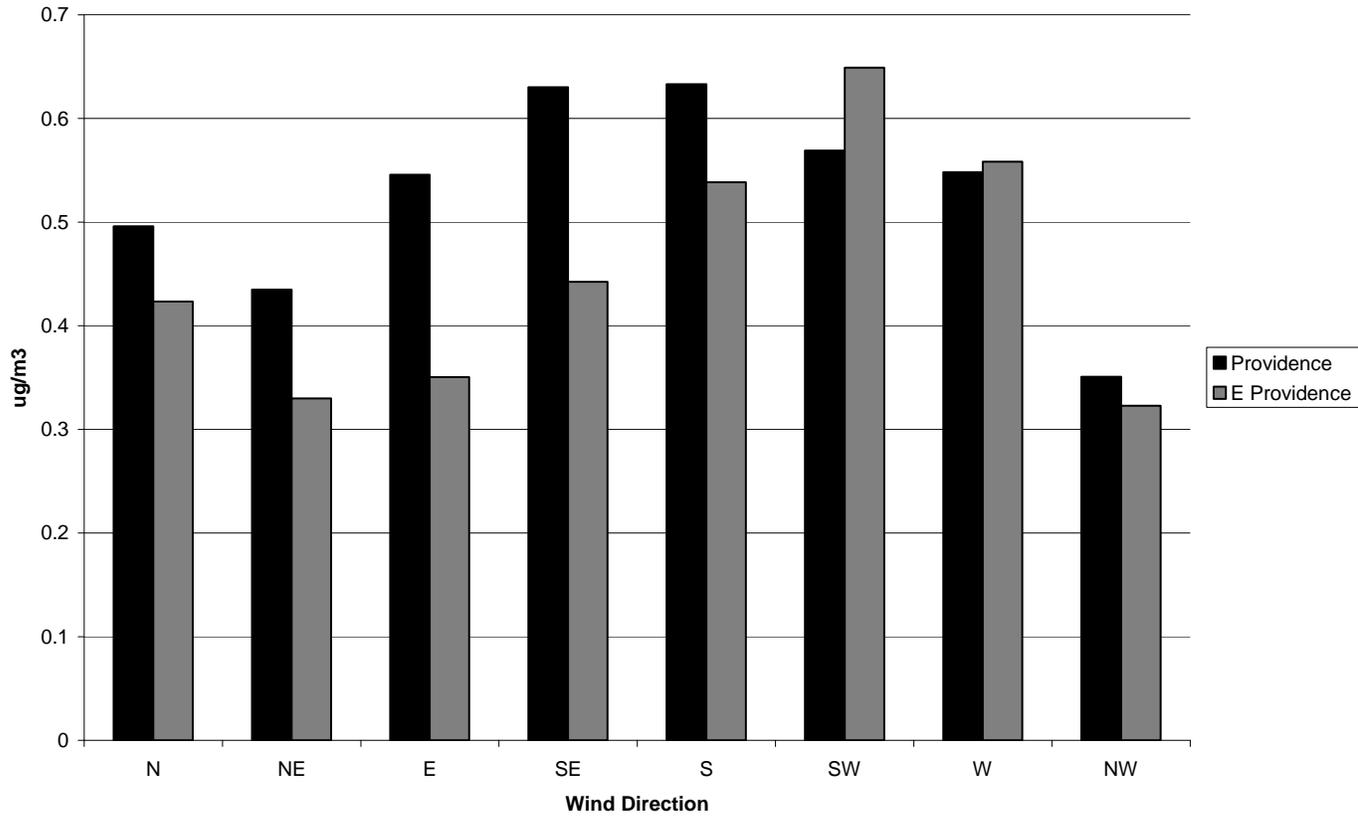


Figure XXI Black Carbon - Average Hourly Concentrations

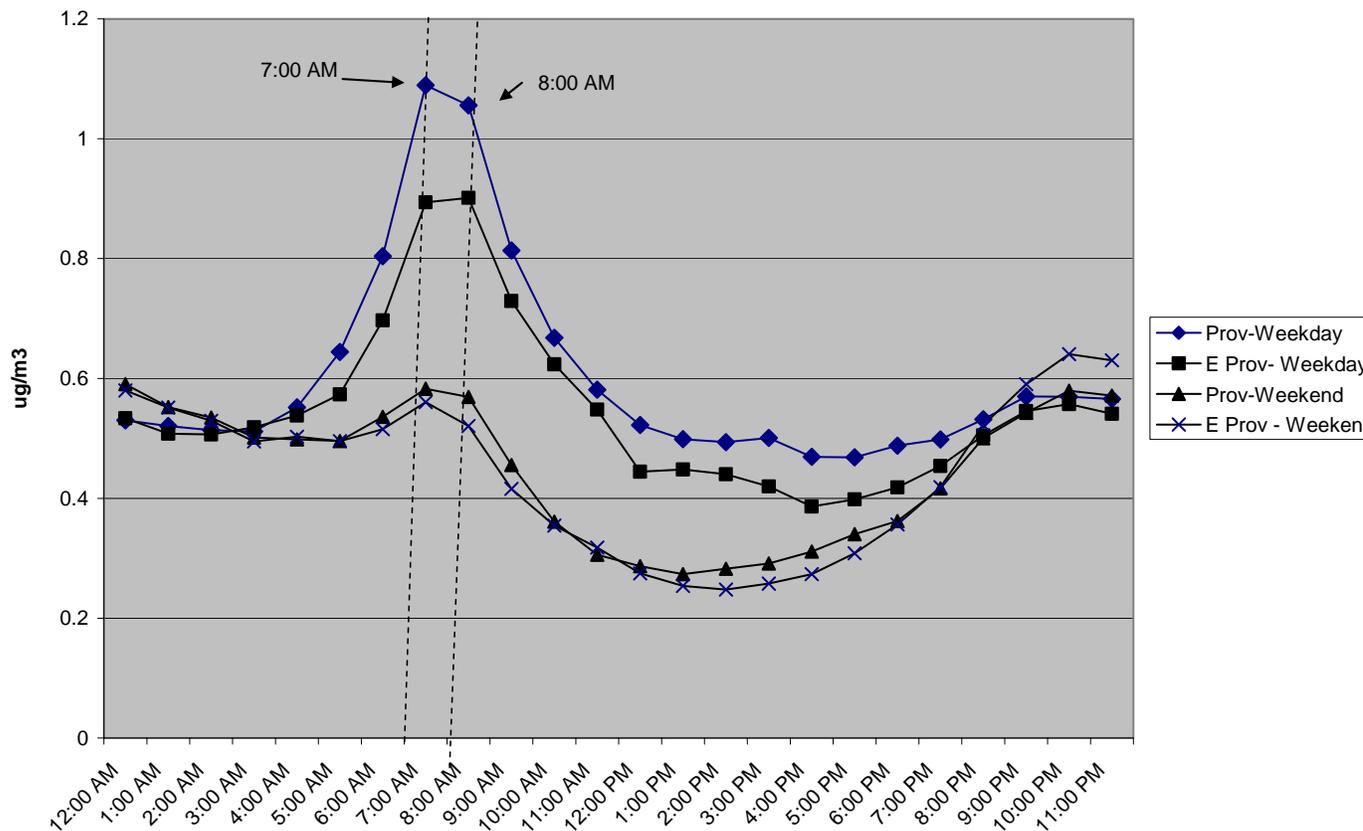

Semi-Volatile Organic Compounds

Rhode Island began monitoring of semi-volatile compounds (SVOCs) including polycyclic aromatic hydrocarbons (PAHs) at the Urban League NATTS site in July 2008. The following SVOCs are measured: 9-fluorenone, acenaphthene, acenaphthylene, anthracene, benzo(a)anthracene, benzo(a)pyrene, benzo(b)fluoranthene, benzo(e)pyrene, benzo(g,h,i)perylene, benzo(k)fluoranthene, chrysene, coronene, cyclopenta[cd]pyrene, dibenz(a,h)anthracene, fluoranthene, fluorine, indeno(1,2,3-cd)pyrene, naphthalene, perylene, phenanthrene, pyrene and retene. SVOC results will be summarized in future Air Quality Data Summaries, when a full year of data is available.